



# DECODE SURVEILLANCE NYC

METHODOLOGY

**Amnesty International is a movement of 10 million people which mobilizes the humanity in everyone and campaigns for change so we can all enjoy our human rights. Our vision is of a world where those in power keep their promises, respect international law and are held to account. We are independent of any government, political ideology, economic interest or religion and are funded mainly by our membership and individual donations. We believe that acting in solidarity and compassion with people everywhere can change our societies for the better.**

© Amnesty International 2022

Except where otherwise noted, content in this document is licensed under a Creative Commons (attribution, non-commercial, no derivatives, international 4.0) licence.

<https://creativecommons.org/licenses/by-nc-nd/4.0/legalcode>

For more information please visit the permissions page on our website: [www.amnesty.org](http://www.amnesty.org)

Where material is attributed to a copyright owner other than Amnesty International this material is not subject to the Creative Commons licence.

First published in 2022

by Amnesty International Ltd

Peter Benenson House, 1 Easton Street

London WC1X 0DW, UK

Index: AMR 51/5205/2022

Original language: English

[amnesty.org](http://amnesty.org)



*Cover photo: Eliana Rogers. © 2021 Amnesty International*

**AMNESTY**  
INTERNATIONAL



# CONTENTS

|   |           |
|---|-----------|
| <b>1. ANALYSIS OF CROWDSOURCED DATA</b>                             | <b>5</b>  |
| 1.1 FINDING SUMMARIES   | 5         |
| 1.1.1 CAMERA COUNTS   | 5         |
| 1.1.2 FOCUS ON INTERSECTIONS  | 6         |
| 1.1.3 FOCUS ON BOROUGHES  | 6         |
| 1.2 PROJECT DESIGN  | 6         |
| 1.2.1 SITUATING AND SCOPING THE WORK                                | 6         |
| 1.2.2 MODELLING THREATS TO REDUCE RISK                              | 8         |
| 1.2.3 COLLECTING THE LIST OF INTERSECTIONS                          | 9         |
| 1.2.4 MICRO TASKING DESIGN  | 11        |
| 1.2.5 SUPPORT AND ACCESSIBILITY                                     | 11        |
| 1.2.6 PILOT STUDY   | 12        |
| 1.2.7 USER INTERFACE AND TESTING                                    | 13        |
| 1.2.8 GEOREFERENCING PANORAMAS                                      | 14        |
| 1.2.9 DATA RECORDED   | 14        |
| 1.3 DATA CLEANING, EXPLORATORY DATA ANALYSIS, AND QUALITY ASSURANCE | 14        |
| 1.3.1 INTERSECTIONS CLEANING  | 14        |
| 1.3.2 AGGREGATION AND EXPLORATORY DATA ANALYSIS                     | 14        |
| 1.4 QUALITY ASSURANCE   | 15        |
| 1.4.1 QUALITATIVE REVIEW: VISUAL INSPECTION                         | 15        |
| 1.4.2 QUANTITATIVE REVIEW: QUANTIFYING TRUSTWORTHINESS              | 16        |
| 1.5 FINAL COUNTS  | 21        |
| 1.6 DISCUSSION AND IDEAS TO EXPLORE                                 | 21        |
| 1.6.1 DONE BUT NOT USED FOR FINAL NUMBERS                           | 21        |
| 1.6.2 POSSIBLE FURTHER ANALYSES, DESIGNED BUT NOT DONE              | 22        |
| 1.7 CONCLUSION  | 23        |
| <b>2. ANALYSIS OF STOP-AND-FRISK + CAMERA LOCATIONS</b>             | <b>24</b> |
| 2.1 DATA PREPARATION AND INSPECTION                                 | 24        |
| 2.1.1 DEMOGRAPHICS  | 25        |

|   |           |
|---|-----------|
| 2.1.2 STOP+FRISK  | 27        |
| 2.1.3 SURVEILLANCE  | 28        |
| 2.1.4 SURVEILLANCE / POPULATION   | 29        |
| 2.2 THE NUMBER OF STOP+FRISK INCIDENTS IS CLOSELY LINKED TO THE LEVEL OF SURVEILLANCE | 33        |
| 2.2.1 SANITY CHECKS   | 35        |
| 2.3 STOP+FRISK RATES ALSO VARY WITH RACIAL MIX, ON TOP OF THE LINK TO SURVEILLANCE    | 36        |
| 2.3.1 SANITY CHECKS   | 37        |
| 2.4 HOW DOES SURVEILLANCE DEPEND ON DEMOGRAPHICS ETC.?                                | 39        |
| 2.4.1 MODEL CHOICE  | 40        |
| 2.4.2 SANITY CHECKS AND DATA PLOTS  | 42        |
| 2.5 HOW ELSE DO STOP-AND-FRISK ACTIONS DEPEND ON SURVEILLANCE?                        | 45        |
| 2.5.1 SUSPECTED CRIME DESCRIPTION   | 45        |
| 4.2 CHANCE OF BEING FOUND INNOCENT  | 47        |
| 4.3 "STOPPED WHILE BLACK"   | 49        |
| <b>ACKNOWLEDGEMENTS</b>   | <b>51</b> |
| <b>REFERENCES</b>   | <b>52</b> |

# ANALYSIS OF CROWDSOURCED DATA

## 1.1 FINDING SUMMARIES

We summarize here the counts of the cameras found by the decoders, after the data processing described in this methodology.

The numbers for the boroughs of Manhattan, The Bronx and Brooklyn differ slightly away from those published in the [preliminary analysis we described this summer](#); these minor changes are due to having matched the latitude/longitude coordinates to the exact panorama observed rather than to the theoretical intersection location, and redone the allocation per Borough based on NYC.gov shapefiles.

### 1.1.1 CAMERA COUNTS

Figure 1: Camera counts

| What are we counting?                                    | Total<br>(calculated by summing the median votes) | Percentage<br>(of the sum) |
|--|---|----------------------------|
| Cameras attached buildings                               | 22,133  | 86.7%                      |
| Cameras attached street lights, traffic signals or poles | 3,317   | 13.0%                      |
| Cameras attached something else                          | 86  | 0.3%                       |
| All cameras  | 25,536 (if we sum the categories above)           | 100%                       |

When we count only cameras attached to streetlights, traffic signals or poles that are also dome type, and so most likely to be the New York Police Department (NYPD) or the Department of Transportation (DOT):

|   |       |       |
|---|-------|-------|
| Cameras attached to street lights, traffic signals or poles AND are dome type | 2,266 | 8.87% |
|---|-------|-------|

## 1.1.2 FOCUS ON INTERSECTIONS

Figure 2. Intersections

|  |                    |
|--|--------------------|
| Total number of intersections analysed   | 43,406             |
| Total number of intersections with at least one camera   | 14,100<br>(32.49%) |
| Total number of intersections with at least one camera attached to street light, traffic signal or pole                    | 2,442              |
| Total number of intersections with at least one camera attached to street lights, traffic signals, poles that is dome type | 1,614              |

## 1.1.3 FOCUS ON BOROUGHES

Figure 3: Camera counts by borough

|   | Manhattan      | Brooklyn | The Bronx | Staten Island | Queens | Total  |
|---|----------------|----------|-----------|---------------|--------|--------|
| All cameras                                     | 3,948          | 9,232    | 3,737     | 1,035         | 7,580  | 25,532 |
| Attached streetlights, traffic signals or poles | 724<br>(18.3%) | 871      | 456       | 178           | 1,088  | 3,317  |

Figure 4: Camera-per-intersection by borough

|   | Manhattan | Brooklyn | The Bronx | Staten Island | Queens | Total |
|---|-----------|----------|-----------|---------------|--------|-------|
| All cameras                                     | 1.00      | 0.89     | 0.60      | 0.16          | 0.46   | 3.11  |
| Attached streetlights, traffic signals or poles | 0.18      | 0.08     | 0.07      | 0.03          | 0.07   | 0.43  |

## 1.2 PROJECT DESIGN

### 1.2.1 SITUATING AND SCOPING THE WORK

Our first task was to situate the planned research in a history of anti-surveillance activism in the USA, in particular New York City, and, critically, to learn from the work of others. To do this we asked scoping questions, including: Who has attempted camera surveys before and what we can learn from them? Has





The areas in blue have been imaged by Google Street View © Google Earth

## 1.2.2 MODELLING THREATS TO REDUCE RISK

The novelty of the methodology and scale of the proposed research meant that the project carried significant risk. Two threat modelling workshops helped us tease out discrete risks and identify mitigation strategies. Below are notes from the section on volunteer-related risks, other areas included technical, legal, malicious actors, and privacy.

|   |  |
|---|--|
| <p>When completing tasks, volunteers are unsure <b>which cameras are public.</b></p>  | <ul style="list-style-type: none"> <li>• Create a Help section in the task presenter</li> <li>• User test</li> <li>• When the project is live, review the level of “agreement” between decoders</li> </ul>   |
| <p>When competing tasks, volunteers at different locations count the same camera causing <b>duplicates</b> in the data.</p>   | <ul style="list-style-type: none"> <li>• Limit zoom and user test</li> <li>• Account for the scenario in the onboarding tutorial and user test</li> <li>• When post processing of the data, use the proximity of locations, camera classification, and/or URLs to identify duplicates in the end data</li> </ul> |
| <p>Volunteers to <b>not agree on the number of cameras.</b> This pushes up the total tasks that need to be served before the assignment/asset is completed. As a result, progress is slow, and the cost of the API increased as we repeat tasks.</p>  | <ul style="list-style-type: none"> <li>• The completion criterion is the number of submissions. Level of agreement does not affect completion.</li> </ul>  |
| <p>Volunteers <b>do not reliably categorise camera types</b> meaning it takes more users than expected to reach the matching criteria. This pushes up the total tasks that need to be served before the assignment/asset is completed. As a result, progress is slow, and the cost of the API increased as we repeat tasks.</p> | <ul style="list-style-type: none"> <li>• Camera categorisation does not determine the completion criteria.</li> <li>• Have a category that is "Don't know or other camera type"</li> </ul>   |

Threat modelling workshop notes, 2021 © Amnesty International


Unlike past Amnesty Decoders projects, which stored the assets used for micro tasking locally, Decode Surveillance NYC was reliant on paid access to [Dynamic Street View API](#). To ensure we covered NYC within budget and to schedule (approximately two months), the team decided to focus on the city's more than 45K traffic intersections.

Traffic intersections afford views of multiple streets, making them strategic locations for the surveillance devices to be installed. Therefore, focusing on intersections rather than random locations makes it more likely to find surveillance cameras.

### 1.2.3 COLLECTING THE LIST OF INTERSECTIONS

OpenStreetMap (OSM) in conjunction with GIS software was used to generate a geospatial dataset of traffic intersections in New York City. Another dataset was created using the same methodology but using New York City Department of City Planning (DCP) data (instead of OSM) as the source. The OSM dataset was chosen because the midpoints of intersections were more centrally located when used with Google products, and the data contained fewer false positives, that is intersections with multiple coordinates.

During the earlier scoping exercise, Department of Transport (DOT) cameras on expressways were identified as positioned relatively high compared to other DOT or NYPD cameras, and so less likely to produce images at a resolution compatible with facial recognition software.<sup>1</sup> As a result, the team made the decision to exclude expressways from the final dataset, and so the analysis.

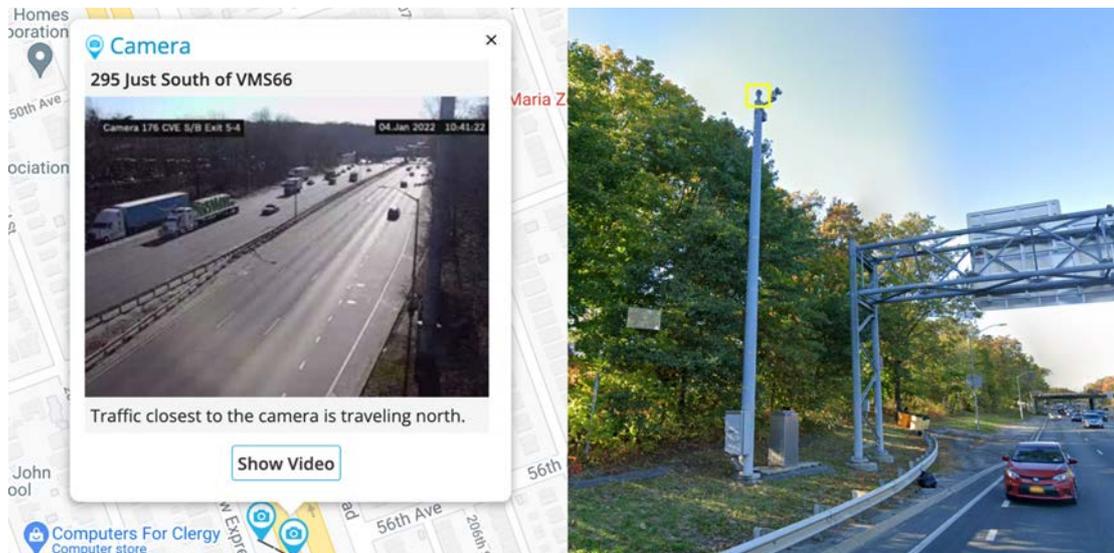

Left: A DOT public camera feed of Clearview Expressway (Interstate 295) accessed via 511ny.org © 511 New York. Right: The same DOP camera as seen in a Google Street View image dated October 2019 © Google Street View

The data was then cleaned manually to remove duplicates as well as stray points such as coordinates in parks and cemeteries.


To avoid user created images (photos uploaded to the Google by people) and indoor images, the following criteria were used to select the panoramas:

preference: `window.google.maps.StreetViewPreference.BEST,`

source: `window.google.maps.StreetViewSource.OUTDOOR`

<sup>1</sup> Additional research by Amnesty International in 2021 found that the minimum resolution required by commercially available face recognition software can be as little as approximately 24 px /face width. See: Julien Cornebise, Swetha Pillai, Martyna, Marciniak, Sophie Dyer, Citizen Evidence Lab, November 2021. <https://citizenevidence.org/2021/11/17/decode-surveillance-early-analysis>, "Decode Surveillance NYC early analysis" (accessed 7 January 2021)

A maximum distance of 13 meters from the traffic intersection coordinates was also set. If no panorama was available within 13 meters, the volunteer could report “no image” from the “Report an error” menu.

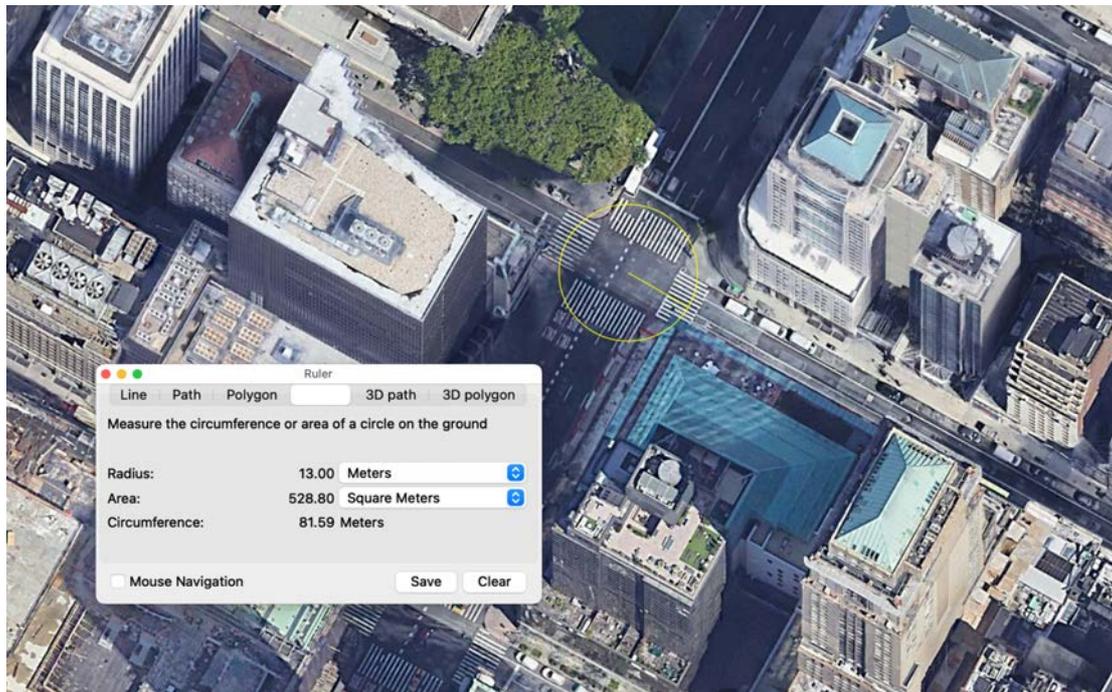

An intersection in Manhattan with a 13-metre radius overlay © Google Earth Pro

**Please explain the issue**

No image

The image is blurred

I am not at an intersection

Other

**SUBMIT ERROR**

**i** Report an error with this task

**Please explain the issue**

No image

The image is blurred

I am not at an intersection

Other

**SUBMIT ERROR**

**i** Report an error with this task

The options given to volunteers when selected “Report an error”, 2021 © Amnesty International

## 1.2.4 MICRO TASKING DESIGN

It was important for the research to be able to classify cameras as publicly or privately owned. Without access to this information and with a view to keeping the micro tasking questions as simple as possible, the team decided to use what cameras were attached to as a proxy for public or private ownership.

Volunteers were asked to find all surveillance cameras and record what they were attached to. Three multiple choice options were given:

1. Streetlight, traffic signal or pole
2. Building
3. Something else

If volunteers selected option 1. “Streetlight, traffic signal or pole”, they were asked to identify the camera type. We chose three visually distinct, high-level categories:

1. Dome or PTZ camera\*
2. Bullet camera
3. Unknown or Other


\*PTZ is an acronym for Pan Tilt Zoom

The answers were then used as a proxy for public or private ownership. For example, cameras attached to traffic signals or streetlights were assumed to be most likely owned by a government agency. In this sub-category, dome or PTZ cameras were of particular interest as they were likely to be NYPD Argus cameras. Whereas cameras attached to buildings were assumed to be privately owned and so of less relevance to the research, although we recognized that a minority would be attached to federal buildings.

## 1.2.5 SUPPORT AND ACCESSIBILITY

The quality of the data collected rested on successfully onboarding a diverse cohort of volunteers, many lacking pre-existing knowledge of the subject. For the micro tasking to produce reliable data we needed volunteers to give consistent answers or, to put it another way, agree with each other the majority of the time.

The multiple-choice questions were illustrated by pictograms drawn by an illustrator. The illustrations were used throughout the project site to reinforce instructions, and as visual aids for volunteers who were not fluent in English or would otherwise benefit.

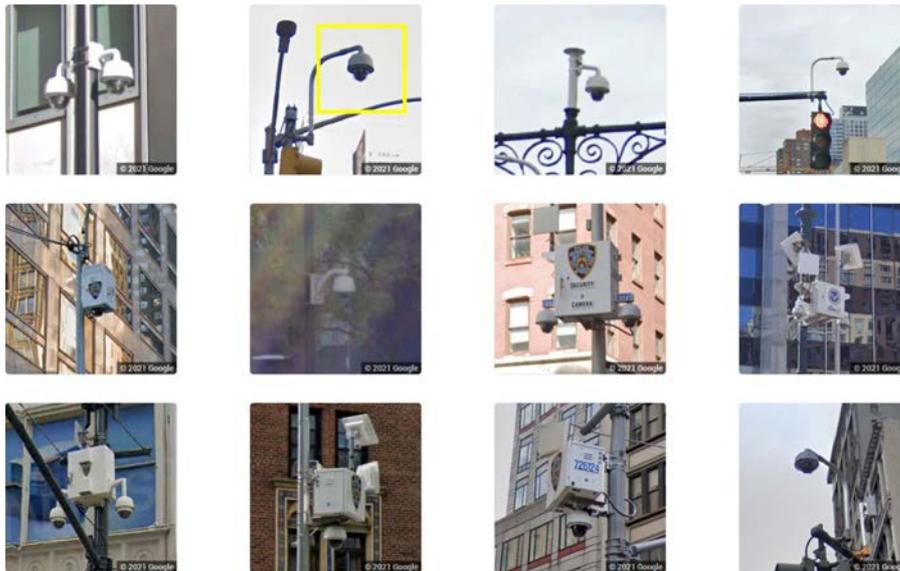

*The visual help guide featured images of cameras from each category, as well as objects that could be misidentified such as streetlamps, cell towers, and strobe detectors © Google Street View*

In addition, the team produced a [tutorial video](#) filmed on location in New York city and a visual help guide that was always accessible to logged in volunteers via a sidebar. For the first 20 tasks, occasional pop-up notifications such as, “Don’t forget to look up and zoom in” and “Not sure if it is a camera? Don’t tag it” repeated tips from the tutorial video.



*Pop-up notifications repeated tips from the tutorial and encouraged volunteers, 2021 © Amnesty International*

Similarly, to previous Amnesty Decoders, volunteers could also access a moderated forum. When logged in, volunteers could access the forum via the navigation bar at the top of the page or by flagging the task for discussion. Flagging an assignment opened a new discussion thread (if the traffic intersection had not been flagged before) or added to an existing thread (if the traffic intersection had already been flagged by another volunteer) in the forum. Volunteers could then add a comment or question as well as upload supporting materials such as screenshots and links.

The forum was designed to a space for:

- **peer-to-peer support and learning.** Peer-to-peer support via the forum has been critical to the success of Amnesty Decoders since its launch in 2016 by scaling up the support Amnesty can offer, while empowering volunteers to take ownership of the project, share lessons learned, and build community and knowledge around the issues at stake;
- **positive feedback and encouragement to volunteers.** The forum is a space for volunteers, from new to returning, to share achievements and receive encouragement. Near real time feedback reinforces the feeling of being part of a “live” research project;
- **Amnesty to communicate with volunteers.** For example, give project updates such as milestones, and share news of events such as an AMA (Ask Me Anything) with a researcher;
- **the project team to gain real time feedback** about volunteers’ experiences including areas of difficulty, common frustrations, or mistakes, as well as bugs. This allows Amnesty to make improvements such as tweaks to the user interface or data collected while the project is live.

The forum was moderated by the project team, supported by a group of 10–15 volunteer moderators. Our volunteer forum moderators were based in different countries, and ranged from students to workers, with diverse abilities and experiences.


Combined the video tutorial, visual Help Guide and moderated forum ensured that volunteers could access support at every stage of the micro tasking.

Although the materials for the wider Ban the Scan campaign were produced in English, Spanish, and Arabic, because of the challenges of moderating the forum, Amnesty was only able to deliver Decode Surveillance in English. Although the project team worked to simplify and reduce the written instruction as well as use illustrations, we recognize that language was a barrier to access.

Likewise, although the website was designed mobile first, the connectivity requirements limited access to those with an internet connection and the data to participate. To mitigate this in part, the site was designed and developed so that it did not require large bandwidth or the latest operating system to load.


## 1.2.6 PILOT STUDY

A pilot study was run with 15 volunteers on a prototype of the user interface. The variability of answers indicated the need for multiple decoders on each intersection. Measures of the average labelling time per intersection, scaled by the estimated likely engagement of decoders on the basis of previous campaigns, confirmed that it was reasonably possible to label each intersection by 3 different graders, but that going beyond that amount of replication would risk being unable to cover the total surface of NYC.

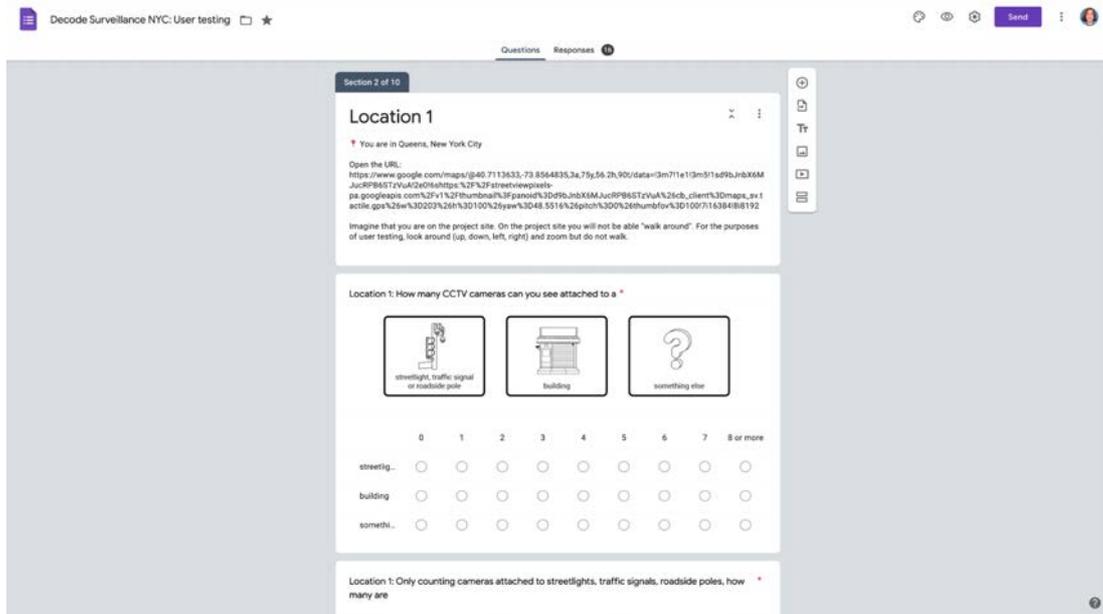

The speed of project build meant that it was not possible to conduct user testing on beta versions of the site. Instead, the team used interviews, surveys, and workshops, 2021 © Amnesty International

## 1.2.7 USER INTERFACE AND TESTING

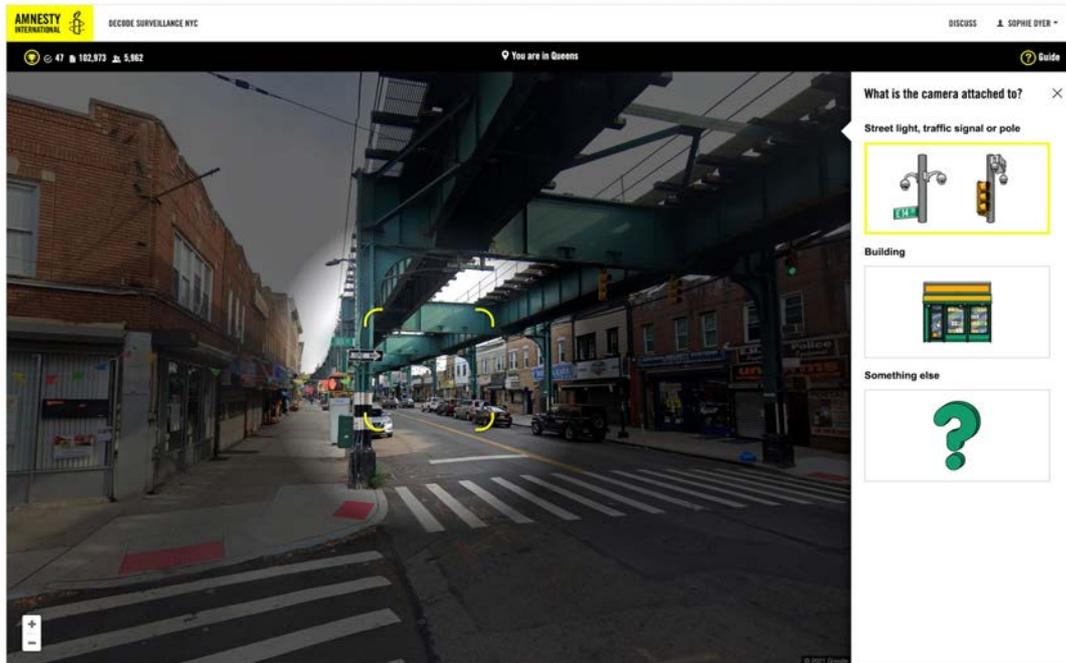

Final design for user interface on desktop, 2021 © Amnesty International

User testing steered many design decisions. Critically, it helped us identify which instructions volunteers would likely ignore, such as the command to only count cameras attached to streetlights, traffic signals or other roadside poles. User testing revealed that, regardless of how this instruction was delivered, most volunteers counted all cameras including those on buildings.

## 1.2.8 GEOREFERENCING PANORAMAS

The intersection dataset came with latitude/longitude coordinates, that were fed into Google Street View API upon connection of the first decoder seeing this task, to get the nearest panorama available in Street View. The platform recorded the unique identifier of that panorama and subsequently reused it for every decoder visiting that intersection, ensuring that all decoders saw the same image.

## 1.2.9 DATA RECORDED

Upon being shown a panorama of an intersection, the decoders were free to rotate around a left-right 360 degree axis, look up and down 90 degrees, zoom forward, and click on any part of the image to “tag” a camera. The platform recorded the spherical coordinates of the decoder’s point of view in the panorama, alongside the decoder’s observation of the type of attachment of the camera (street furniture/building/unknown), and for those cameras labelled as attached to street furniture, the observation of the type of camera (bullet/dome PTZ/unknown). The platform also stored a pseudonymized unique ID of the decoder and the date/time of the submission.

# 1.3 DATA CLEANING, EXPLORATORY DATA ANALYSIS, AND QUALITY ASSURANCE

## 1.3.1 INTERSECTIONS CLEANING

After loading the labelled dataset, we replaced the intersection’s original latitude and longitude with that of the matched panorama, as provided by Google Street View metadata. This established the panorama (i.e., the photo labelled by the decoders) as the geographical reference and guaranteed that the geographic coordinates of the labels were matching what the decoders actually saw, removing any potential offset between intersection and panorama.

In the rare occasions where two or more intersections were matched to a common panorama, we merged those into a single intersection at the location of the panorama, therefore these intersections had more decoders than other intersections. We then only kept 3 decoders (sampled uniformly at random) at each such resulting merged intersection, to ensure comparable variance of observations with all other intersections.

For the preliminary results published in the 3 June 2021 [press release](#), we aggregated the intersections by their Neighbourhood Tabulation Areas (NTAs), with arbitrary tie-breaking at boundaries. NTAs are a NYC Planning aggregation of census tracts that approximately represents neighbourhoods — see [NYC Population: Geographic Reference](#) for more details on that geographic unit. This allowed mapping and geographic interpretation.

## 1.3.2 AGGREGATION AND EXPLORATORY DATA ANALYSIS

Aggregating the three decoders’ answers over an intersection can be done in multiple ways. Amnesty International tries to be as rigorous and conservative in its numbers as possible. We therefore decided to use the median of each intersection’s three decoders’ counts, rather than the mean. The median is indeed less sensitive to outliers than the mean – and those outliers would mostly be overcounts, because the number of observed cameras is lower-bounded by 0. Therefore, by using the median at each intersection we favour undercounts rather than overcounts, while still keeping a better representation than if we were to take the minimum count.

As an exploratory analysis, we also compared the amount of disagreement, i.e. three unanimous decoders, or 1 vs 2, or 3 disagreeing decoders; split by median and camera type, i.e. public vs private.


This confirmed the intuitive result that the higher the median (and hence likely the underlying number of cameras and complexity of the intersection), the higher the amount of disagreement (as the potential for missed cameras or false detection increases).

## 1.4 QUALITY ASSURANCE

In order to assess the quality of the resulting numbers, we proceeded to both a qualitative and a quantitative review.

### 1.4.1 QUALITATIVE REVIEW: VISUAL INSPECTION

The qualitative review served as a first visual inspection. It consisted of 100 completed intersections selected specially to cover a wide range of disagreement. We extracted the cameras found by the decoders into a mosaic for easy review by a trusted expert, as shown below.

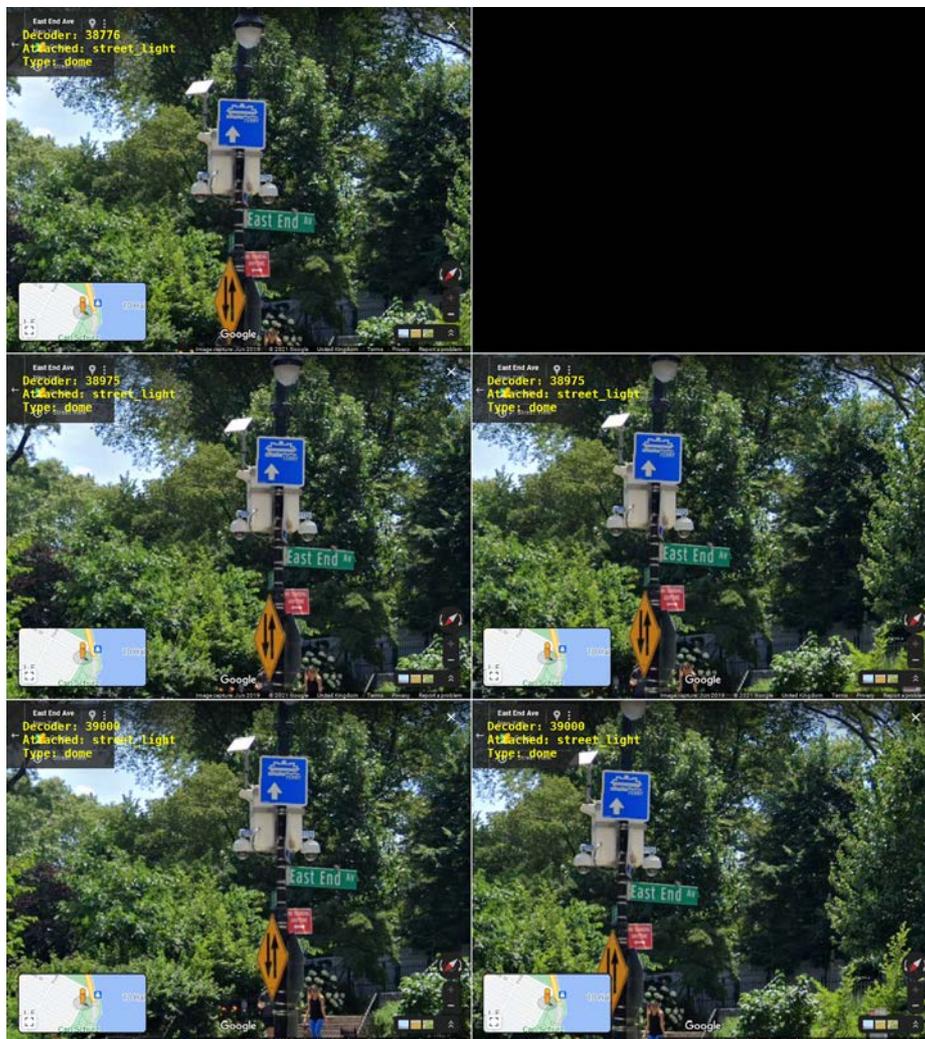

Mosaics provided to the expert for the qualitative review. Each mosaic covers an intersection, and row shows images of all the tags from one decoder at one intersection. Tags are sorted by angle from the North for easier comparison. Black tiles serve as padding when the decoder tagged fewer locations than another decoder in the image.

This expert, chosen as one of the most involved volunteers on the forum, and who had participated in several Decoders campaigns, was then briefed by the head of the project, and they reviewed all found cameras on these intersections as well as checking the intersections directly in Street View.

We asked the expert to make notes of any repeated patterns of mistakes made by the decoders as a whole, to check for any glaring systematic pattern, and understand possible failure modes. This qualitative review confirmed that Decode Surveillance is the most difficult Decoders task undertaken, as there are quite a few different error modes. However, upon inspection, the median seemed to filter out the most egregious mistakes, as it was rare to see two decoders out of three err significantly.

## 1.4.2 QUANTITATIVE REVIEW: QUANTIFYING TRUSTWORTHINESS

The quantitative review that followed aimed to put actual numbers on the amount of disagreement and verify that we did indeed have an undercount.


### SELECTION OF INTERSECTIONS WITH STRATIFICATION AND IMPORTANCE SAMPLING

We used stratification and importance sampling to select 104 completed intersections with 8 typical combinations of median and number of disagreements, for cameras attached to streetlights, poles, or traffic lights, i.e., our proxy for public cameras:

- median of 0 cameras counted and unanimous agreement of all 3 graders,
- median of 0 cameras counted and 2-vs-1 disagreement,
- median of 1 camera and unanimous agreement,
- median of 1 camera counted and 2-vs-1 disagreement,
- median of 1 camera counted and all 3 decoders disagreeing,
- median of 2 cameras counted and unanimous agreement,
- median of 2 cameras counted and 2-vs-1 disagreement,
- median of 2 cameras counted and all 3 decoders disagreeing.

Please note that it is not possible to have a median of 0 if all 3 decoders disagree, hence only 8 classes. This left aside the few intersections with a median of 3 or more public cameras counted, which are few, as can be seen on the figure below.

Figure 5: Distribution of decoders' medians and agreements, public cameras

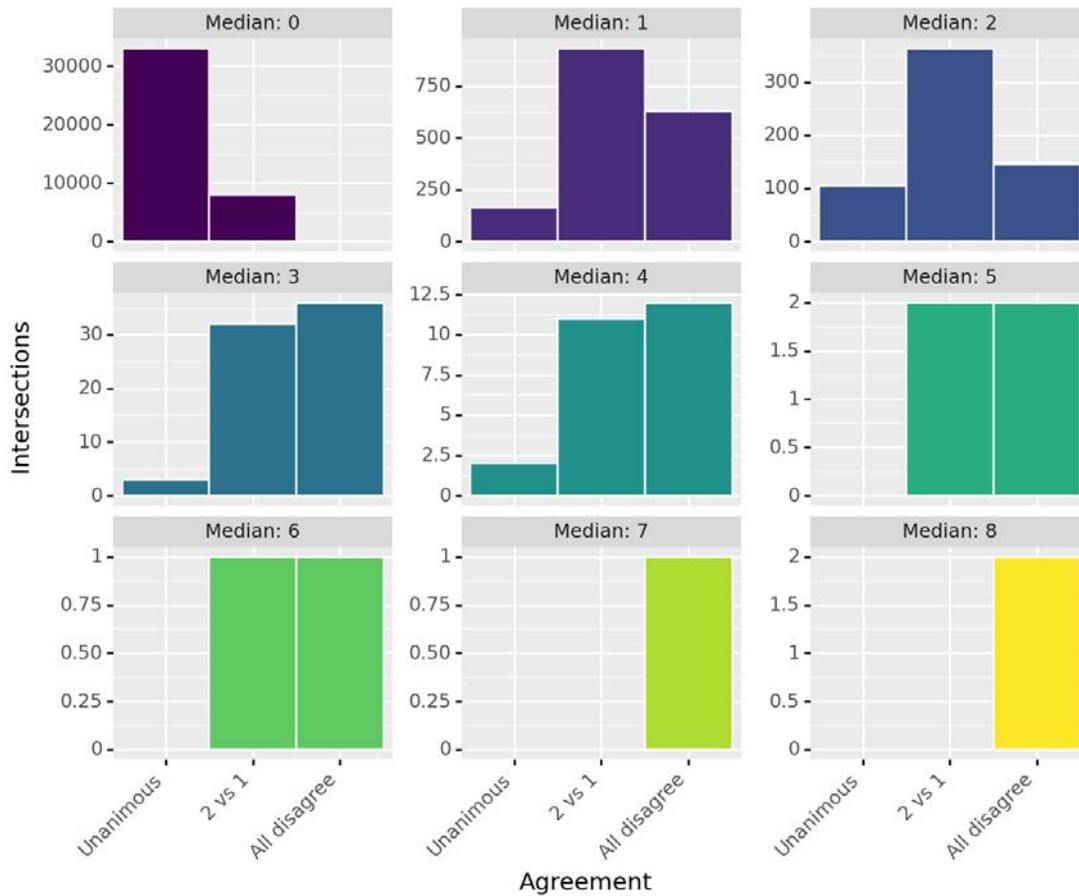

*Distribution of the strata used in the stratification and importance sampling for the quantitative analysis. Each panel represents all intersections with a given median count of public cameras. Each bar represents the number of intersections with a given type of disagreement within this panel. Note the varying Y-axis, which shows that we capture the vast majority of intersections by reviewing only intersections with a median of 0, 1, and 2 public cameras. Only the first 8 strata were sampled for the quantitative review, i.e., all bars on the first row of panels.*

We sampled 13 intersections of each of the above 8 strata. We emphasize that we are using importance sampling: while we over-sample some classes to reduce the variance of the estimator, we do accordingly reweight each sample in the estimator to obtain unbiased estimates according to the population's distribution.

### REFERENCE TRUTH WITH 3 EXPERTS AND A META-EXPERT

To obtain a reference truth, we asked 3 experts to review these 104 intersections, and then had the project lead review the intersections on which these decoders were not unanimous. These 3 experts were chosen as some of the most active decoders on the forum, who provided particularly helpful answers to other decoders, denoting a deep understanding of the task and its subtleties, as well as a strong motivation to help. They kindly accepted to be assigned to this extra task of quantitative reviewing. The meta-review of their disagreements by the project lead helped ensure the highest quality of the counts, at the price of a workload that would have been unsustainable over a larger sample. This provides as close to a "ground truth" as possible on these 104 intersections.

### COMPARISON OF REFERENCE TO DECODERS USING WEIGHTED BOOTSTRAP


We then compared the decoders' counts to the experts.

The most important check is the ratio of the overall total count by the decoders, i.e., the sum over all intersections of the medians over three decoders, divided by the total count by the reference. To ensure a

conservative analysis, this ratio should be lower than 1.0: decoders seeing fewer cameras than experts. Moreover, given the limited number of intersections with reference (104), we want to obtain credibility intervals on this ratio. We achieve this by bootstrapping the intersections, using a weighted bootstrap taking into account the importance sampling weights.

The figure below depicts the resulting empirical distribution of the bootstrapped estimates of the ratio of the sum of medians by the decoders divided by the sum of the reference counts, for the cameras mounted to streetlights, traffic signals or poles, i.e., our proxy for public cameras. It is quite spread out, meaning there is a high variance to this ratio, as expected from the low number of intersections in the quantitative review. However, most of its mass is way below 1: its 95% credibility interval between the 2.5%-percentile and the 97.5% percentile is [0.23, 1]. This means that, based on the quantitative review, we can say with 95% certainty the decoders (as measured by the sum of the medians) find between 23% and 100% of the reference cameras.

Figure 6: Comparison of median of decoders vs experts on public cameras

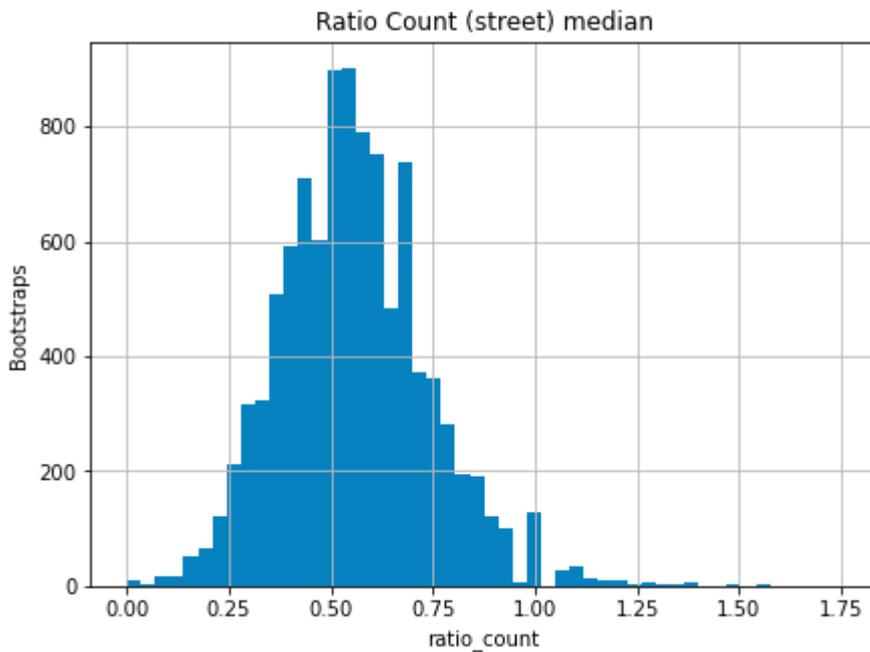


*Histogram of the bootstrapped distribution of the ratio of total counts (sum over intersections of medians over decoders) by the decoders divided by total reference count, for cameras attached to streetlights, traffic signals or poles.*

While this interval is wide, very importantly, it provides a very high level of confidence that the total from the decoders in our whole study is an undercount of the actual ground truth.

We produced the same analysis for the cameras attached to buildings, our proxy for private cameras, with even clearer-cut results, as visualized below:

Figure 7: Comparison of median of decoders vs experts on private cameras

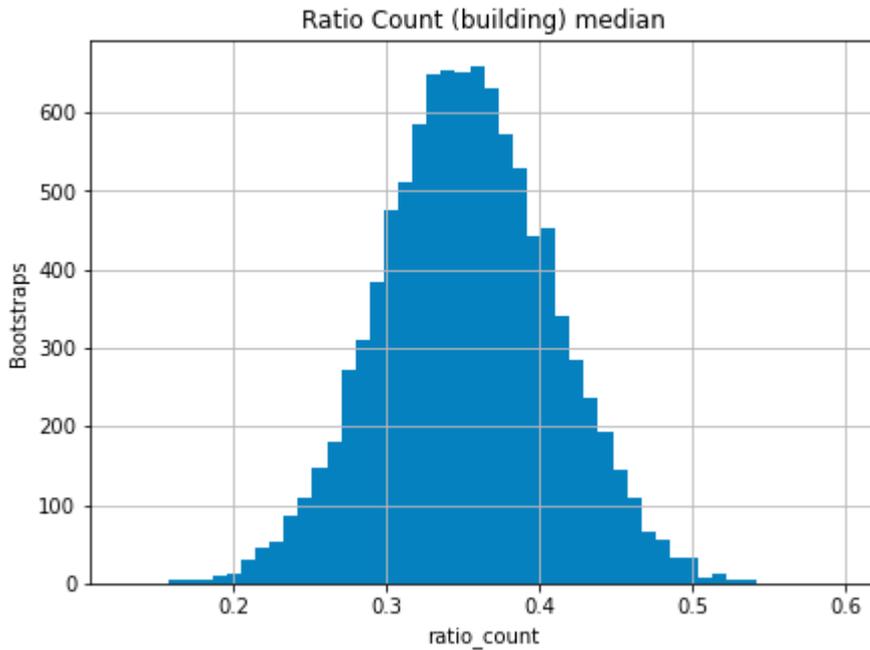

*Histogram of the bootstrapped distribution of the ratio of total counts (sum over intersections of medians over decoders) by the decoders divided by total reference count, for cameras attached to buildings.*

The 95% credibility interval for the ratio of count of building-attached cameras is [0.24, 0.46], meaning that the estimate from the decoders over all intersections is between 2x and 4x smaller than what the reference would be.


For thoroughness, we applied the same analysis to a binary classification task of presence vs absence of cameras, i.e.: did the decoder tag at least 1 camera, as opposed to the actual count. Results were similar.

### **CONFIRMING THE USE OF THE MEDIAN INSTEAD OF THE MEAN**

As described above, we are using the median of each intersection's three decoders' counts as the value for that intersection, for reasons of robustness to over-estimation compared to the mean. To further confirm this decision, we applied the same quantitative analysis of the ratio of totals to the sum of means rather than the sum of medians. Our hypothesis was that the mean would likely lead to overcounts, and therefore that the sum over the intersections of the means of the decoders' scores would likely be higher than the reference count.

This was confirmed in the following graph, which shows the empirical distribution of the bootstrapped samples of the ratio of the sum of the decoders' means divided by the mean of the experts, for public cameras. The distribution is quite heavily skewed above 1, with a 95% credibility interval of [0.85, 3.06], to be compared to the corresponding graph for the median. This confirms that the choice of the median as aggregation of the decoders is preferable to the mean.


Figure 8: Comparison of mean of decoders vs experts, public cameras

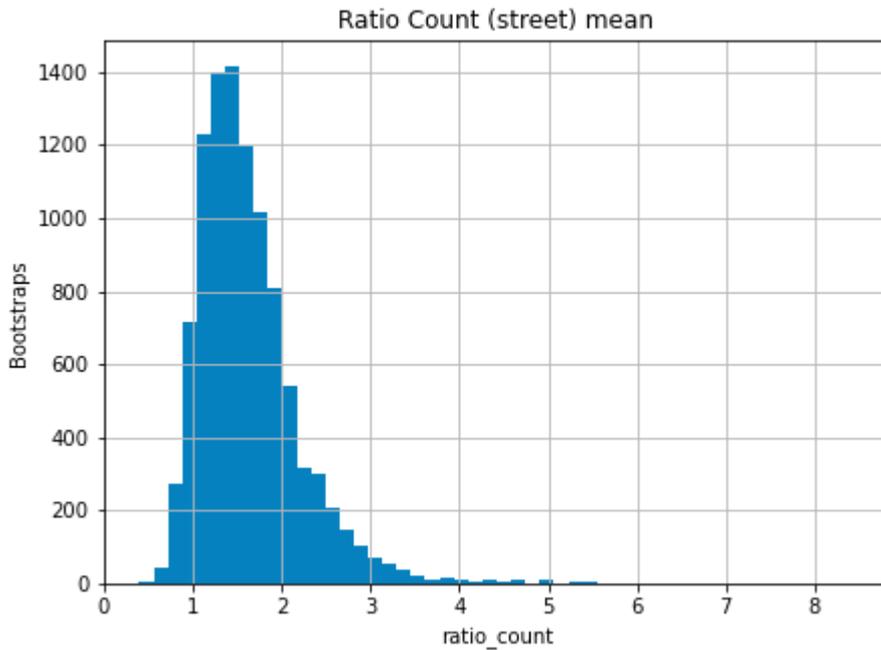

Histogram of the bootstrapped distribution of the ratio of total counts (sum over intersections of means over decoders) by the decoders divided by total reference count, for cameras attached to streetlights, traffic signals or poles.

Interestingly, the same analysis on the cameras attached to buildings does not show such an inversion of the ratio: both mean and median provide comparably under-count by the decoders compared to the experts, as shown in the histogram below.

Figure 9: Comparison of mean of decoders vs experts, private cameras

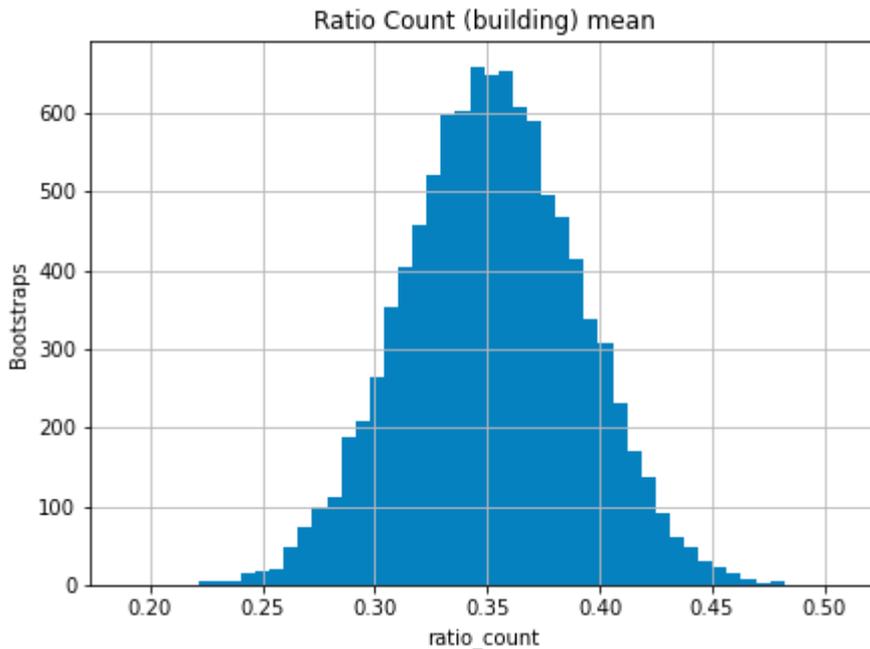

Histogram of the bootstrapped distribution of the ratio of total counts (sum over intersections of means over decoders) by the decoders divided by total reference count, for cameras attached to buildings.

## 1.5 FINAL COUNTS

At this stage, we recapitulate the final procedure described above: the final counts for each intersection are the result of the median of the counts from three decoders, for each category of camera. We have demonstrated so far why this procedure provides robust and conservative estimates, which was a key objective of this study.

These numbers can then be relied upon for the aggregations provided at the top of this document, and for further work by Amnesty International and other organizations.

As a final detail, for clarity of exposure and further conservatism of the numbers, all our counts of “total cameras” have been computed as the sum of the median-based subtotals in each three categories (public, private, unknown) — as opposed to the sum of the median of all three decoders’ individual total across categories. In other words, we use the sum of the medians, rather than the median of the sum. This brings an even more stringent undercount, and more importantly allows all sums across categories to match the total count, in spite of the non-linearity of the median.

## 1.6 DISCUSSION AND IDEAS TO EXPLORE

The above analysis has confirmed that this study meets the rigorous standards we set ourselves, being as conservative as possible on the reported totals.

We also investigated but discarded several avenues and extensions. For transparency, we describe them in this section. We hope this will also avoid others going down the same path and encourage future work by any interested reader.

### 1.6.1 DONE BUT NOT USED FOR FINAL NUMBERS

#### KRIPPENDORFF ALPHA

We originally investigated the reliability of graders using the celebrated Krippendorff Alpha (Hayes and Krippendorff 2007; Krippendorff 1970; 2004a; 2004b; 2011), and in particular the very recent quadrilogy extension (Krippendorff 2020) which stemmed from a fruitful collaboration on Amnesty International’s previous Decode Darfur project in 2017.

We are very grateful to Professor Krippendorff for his care in proposing three new metrics to handle the kind of issues specific to large scale micro tasking data like the Decoders. Sadly, after a deep investigation we eventually had to abandon their inclusion in this report. This is not for lack of interest and relevance of those metrics, but because their development and application to this type of data is so recent that we do not yet have enough experience in interpreting and using them. We made the difficult decision to fall back on metrics we were more experienced with, to ensure our strongest possible analysis of the data within our own abilities.

#### CONFIDENCE INTERVALS ON TOTALS BY BOOTSTRAPPING THE DECODERS

Although the guarantees above provide sufficient guarantees on the conservative aspect of this study, as statisticians, we would prefer to accompany our total counts with confidence intervals.

We investigated an apparently straightforward way to derive credibility intervals on the total counts of cameras: bootstrapping (Efron and Tibshirani 1994; Efron 2003), which would seem applicable since we have thousands of observations. The set of intersections being fixed, each bootstrapped sample involves resampling three decoders with replacement (that part being particularly important for what follows) within each intersection, computing the resulting median within each intersection, and summing these over the intersections. With enough bootstrap samples we obtained a distribution of the total sum of medians. Its empirical quantiles could provide credibility intervals to go with the point estimate provided by the sum of the medians computed on the original dataset.

However, the confidence intervals thereby computed did not include the point estimate. Indeed, even the 2.5-percentile (lower bound of the bootstrapped credibility interval at 95%) was far superior to the point estimate — actually further from the point estimate than from the 97.5-percentile. A less concerned statistician could have taken this credibility interval at face value and use this to inflate the number of cameras. However, in our constant concern to be as conservative as possible we investigated further.

A manual computation of the actual distribution of the sum of bootstrapped medians leads to a sum of Bernoulli, whose confidence intervals matched those simulated, confirming the validity of our implementation.

Since we have the exhaustive list of all intersections and thus do not resample those, the key issue with our bootstrapping is that we are resampling within each intersection, i.e., bootstrapping from only 3 data points, with replacement. This is a rather extreme use of bootstrapping, but one which would not have been as glaring had we used the average rather than the median, thanks to the linearity of the average. The median, beyond being non-linear, is very sensitive to ties. Resampling 3 from 3 with replacement obviously leads to many such ties, and thus the paradoxical behaviour of the bootstrap we were observing.

We therefore abandoned the use of Bootstrap for confidence intervals of the sum of the medians, preferring a single robust point estimator to an unreliable credibility interval.

### **CORRECTING THE UNDERCOUNT**

The quantitative analysis provided an estimate of the undercount factor by the decoders, albeit with a wide credibility interval. We did consider whether to incorporate this factor into the total counts of cameras, using it as a corrective multiplicative factor. We decided against it for two reasons: simplicity and variance.

The simplicity argument goes as follows: this study must be as easily auditable as possible. Therefore, the benefits of any refinement must be weighed carefully against the extra complexity it adds, and the alternative choices it would provide. Incorporating a multiplicative adjustment ratio could be seen as a crude adjustment, which would open many more questions: Shouldn't the adjustment be done instead by adjusting over each point of the whole joint distribution of experts' counts and decoders' counts on each intersection (which we did compute)? Wouldn't a quantile regression be more adequate? Etc. etc. Although these are all valid questions, we would not have the time to answer all of these during this study. Therefore, simplicity and rigour dictate that we avoid any corrective factor.

The variance rejoins the question of confidence intervals mentioned above. We do have credibility intervals on the ratio of decoders vs experts, and we know these are too wide to be ignored. We do not, as discussed above, have such credibility intervals on the sum of medians. We would therefore either use the confidence intervals on the ratio but only the point estimate of the sum as constant, which is difficult to justify, or would use only point estimates for both, which is dishonest given the amount of uncertainty on the exact value of the ratio beyond the fact that it is smaller than 1. More arguments against such a correction factor.

Finally, for the sake of exhaustivity, and in spite of the aforementioned shortcomings of using the mean instead of the median, we did consider a potential combination of the ratio of the mean with the sum of the means. We do have confidence intervals for both, as the mean does not conflict with the bootstrap across decoders like the median does. We computed credibility intervals by assuming independence of the two variables, then the expectation and the variance of this product with classic formulas and used Chebyshev inequality. The resulting bound does provide theoretically valid confidence intervals but is so loose that it is widely over-covering and results in meaningless intervals. A simpler way would have been to use the cross product of the two bootstrapped samples. We mention this purely for the sake of completeness because the preference for the median makes this a moot point.

## **1.6.2 POSSIBLE FURTHER ANALYSES, DESIGNED BUT NOT DONE**

Amnesty International's priority in this study was to provide robust and conservative results that can be easily audited. Anything beyond that, while interesting from a technical point of view and with many potential upsides, had to be left for future investigations. In order to encourage multiple analysts to go further with this data, we list here the most interesting future directions.

We encourage any interested statistician to contact us.

### **INTRODUCE A PARAMETRIC ERROR MODEL ON THE COUNTS**

Rather than using the median, we could have done any kind of regression by introducing a parametric model of error on the counts. There is a wide literature on error models for count, from Poisson-model errors to zero-inflated models, to ad hoc multiplicative error models.

However, we decided to stick to the simplest possible methodology and limit the number of modelling choices, to make this analysis the easiest to review and the most defensible. This involves foregoing, at least in this analysis, any explicit distributional assumption or modelling choice. An alternative would have been a

thorough investigation of multiple possible error models, then proceeding to model criticism and/or model selection, which we simply did not have the time for.

### **BAYESIAN HIERARCHICAL MODELLING FOR UNCERTAINTY QUANTIFICATION**

The most natural modelling approach, given the population nature of the decoders, would be either a mixed-effects model, or, more practical in the authors' professional opinion, a Bayesian hierarchical model, with inference achieved by either MCMC or Variational inference.

This would have had multiple advantages: incorporating custom error models; inferring individual decoders' errors; weighing decoders according to their trustworthiness; incorporating in the same computation the quantitative analysis from the experts and the decoders-led analysis, achieving semi-supervised learning effortlessly; all the while providing distributional results with full uncertainty quantification.

Yet again the priority on robust, conservative, and easily auditable analysis required to leave this for future analysis.

### **SPATIAL INFORMATION FOR FURTHER INFORMATION RECOVERY**

Along with the labels, we recorded the point-of-view data of the decoders' tags, i.e., the 3-dimensional spherical coordinates of the reticle in the panorama where they applied the tags. We recorded this spatial information on the tags knowing it was unlikely we could process it by publication date, because we know it is remarkably important for refinements.

Indeed, using this data allows inference not just of camera counts, but of individual camera identification. It can help confirm whether the three decoders are tagging the exact same cameras or intersecting but distinct sets of different cameras. It can bring precious information to reconcile disagreements amongst decoders more accurately than with the median. For example, it could allow the correction of a tag from one minority label to a majority label if the spherical coordinates match.

Algorithmically, this inference of the latent camera identity could be achieved within the aforementioned Bayesian hierarchical model using an Expectation Maximization algorithm.

### **COMPUTER VISION FOR CONFIRMATION OF CAMERA PRESENCE**

The advances in Computer Vision via Deep Learning make it a realistic suggestion to try and automate detection of the cameras straight from imagery, possibly using the decoders' answers as training data. This was beyond the scope of the present study, but could be interesting on multiple levels, as it would possibly generalize to other cities, depending on how similar their cameras and architectures are to NYC's. To be useful, however, those results would need to be analysed with the same critical eye and conservatism as the current study.

## **1.7 CONCLUSION**

In addition to this methodology note, we are also releasing the resulting data, and the Python code repeating most of the above analysis. With this transparency and release, we intend to further illustrate Amnesty International's commitment to the highest standards of proof and scrutiny, as well as to give back to the community. The authors welcome any questions, contact, ideas, or collaboration on some of the follow-up analyses.

# 2. ANALYSIS OF STOP-AND-FRISK + CAMERA LOCATIONS

```
library(data.table)
library(ggplot2)
library(sf)
library(units)
library(geojsonsf)
library(lme4)
```

```
options(width=150)
theme_set(theme_bw(base_size=16))
```

Linking to GEOS 3.8.0, GDAL 3.0.4, PROJ 6.3.1; sf\_use\_s2() is TRUE

udunits database from /usr/share/xml/udunits/udunits2.xml

Loading required package: Matrix

## 2.1 DATA PREPARATION AND INSPECTION

### SOURCES

- Stop-and-frisk (SQF) data from NYPD, 2019 and 2020. <https://www1.nyc.gov/site/nypd/stats/reports-analysis/stopfrisk.page>
- Census data (demographics etc.) from the American Community Survey (ACS) 2014--2019, downloaded using the `tidycensus` package: <https://walker-data.com/tidycensus/articles/spatial-data.html>
- Census tract shapefiles 2019 from US Census: <https://www.census.gov/cgi-bin/geo/shapefiles/index.php?year=2019&layergroup=Census+Tracts> trimmed to the New York state shoreline: <http://gis.ny.gov/gisdata/inventories/details.cfm?DSID=927>
- Camera locations, as provided by Amnesty's "Decode Surveillance NYC" project

### PREPARED DATASETS

- `tracts`: one row per census tract (excluding two entirely-aquatic census tracts, which have been removed). The shape of each tract is included. (All geo coordinates are in EPSG 2908, the State Plane Coordinate System for NY/LongIsland.)
- `census`: one row per census tract, excluding the two aquatic tracts

- `sqf`: one row per stop-and-frisk incident, spanning 2019 and 2020, labelled by census tract (except for four records in 2020 with nonsense locations, which have been removed)
- `camera`: one row per intersection, including geo coordinates
  - `camera_count`: one row per census tract, giving the number of cameras by several different counting methods:
  - `eff_cameras` is the total area within the tract that is visible by public cameras (assuming a 120m radius), divided by the area seen by a camera.
  - `eff_cameras_within_200m` is the total area within 200m of the tract that is visible by public cameras, divided by the area seen by a camera.
  - `cameras_within_200m` is the total number of public cameras within 200m of the tract.

With the latter two metrics, if there are two cameras in nearly the same spot, the total effective number of cameras is just one, since their areas overlap nearly completely. The idea behind this way of measuring surveillance is that if two cameras are in roughly the same spot it's most likely to cope with obstructed sightlines.

```
# Import and pre-process all the datasets
source('prepdata.R')
```

To install your API key for use in future sessions, run this function with ``install = TRUE``.

Getting data from the 2015-2019 5-year ACS

Warning message in `eval(ei, envir)`:  
“Assigning 3 stops to nearest tract”

## 2.1.1 DEMOGRAPHICS


```
# Population density, from census data
```

```
df <- merge(tracts, census, by='GEOID', all.x=TRUE)
df$area <- set_units(st_area(df), 'mile ^2')
df$density <- df$popn / as.numeric(df$area)

options(repr.plot.width=14, repr.plot.height=10)

ggplot() +
  geom_sf(data=df, aes(fill=ifelse(popn>250,pmin(density,120000),NA))) +
  with(as.list(st_bbox(df)), coord_sf(xlim=c(xmin,xmax), ylim=c(ymin,ymax))) +
  guides(fill=guide_colourbar(title='popn/mile^2')) +
  ggtitle('Population density. Tracts with popn<=250 masked out') +
  theme_bw(base_size=16) +
  theme(panel.background = element_rect(fill='azure'))
```

Population density. Tracts with popn<=250 masked out

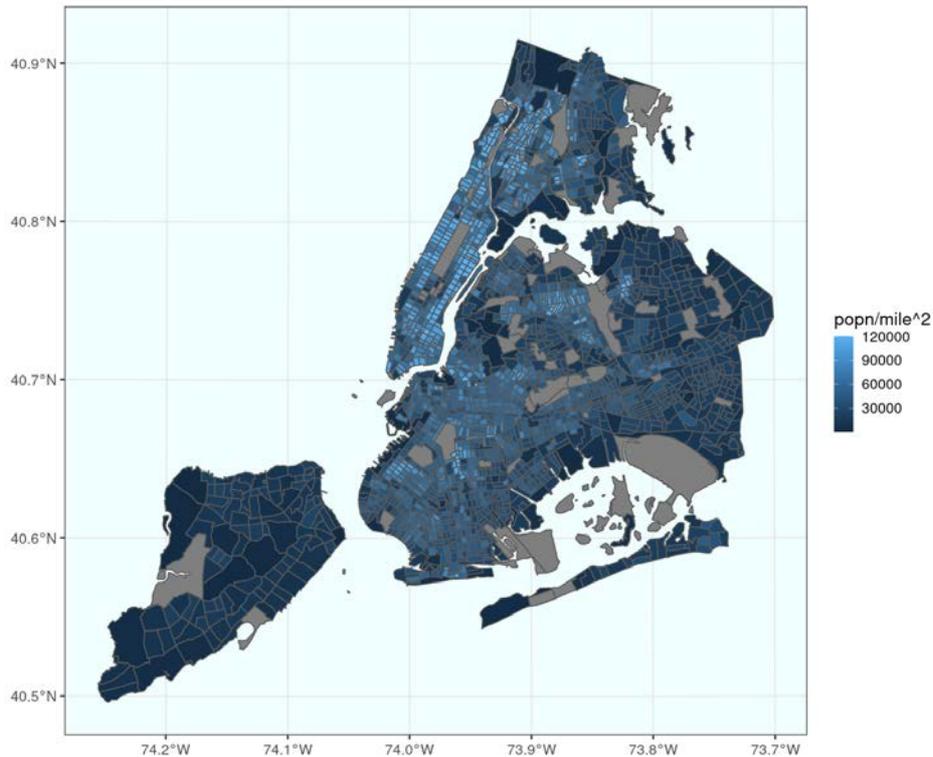

```
# Ethnic mix (black, hispanic, white)
```

```
df <- merge(census, camera_count, by='GEOID', all=TRUE)
df <- merge(df, as.data.table(st_drop_geometry(tracts))[, list(GEOID, borough)], by
='GEOID', all=TRUE)
```

```
# Colour-code by three-way split, Hispanic / Black / White.
```


```
df[, popn2 := ifelse(popn>250, popn.black + popn.hispanic + popn.white, Inf)]
λ.h <- df[, popn.hispanic / popn2]
λ.w <- df[, popn.white / popn2]
λ.b <- df[, popn.black / popn2]
df[, ethcol := rgb(λ.h, λ.b, λ.w)]
eth_guide <- df[c(which.max(λ.h), which.max(λ.b), which.max(λ.w))]
eth_guide[, label := c('hispanic', 'black', 'white')]
```

```
dft <- merge(tracts[, 'GEOID'], df, by='GEOID')
```

```
options(repr.plot.width=14, repr.plot.height=10)
```

```
ggplot() +
  geom_sf(data=dft, aes(fill=ifelse(popn>250, ethcol, 'grey80'), col='grey80') +
  scale_fill_identity(guide='legend', breaks=eth_guide$ethcol, labels=eth_guide$label) +
  guides(fill=guide_legend(title='ethnic mix')) +
  ggtitle('Ethnic mix (showing only Black/Hispanic/White)') +
  theme_bw(base_size=16) +
  theme(panel.background = element_rect(fill='azure'))
```

Ethnic mix (showing only Black/Hispanic/White)

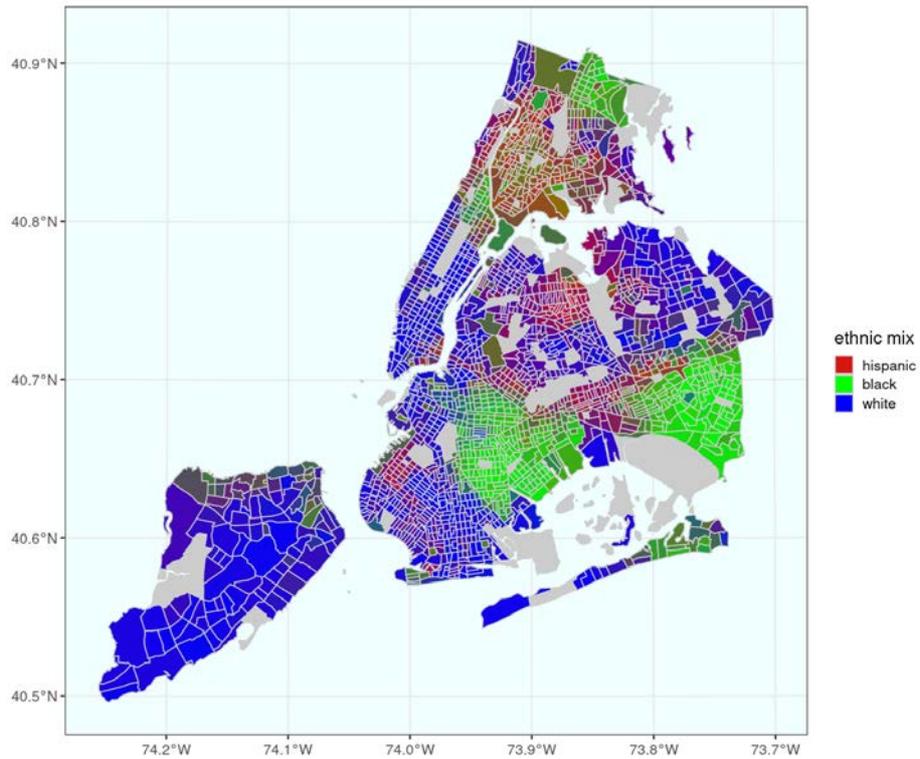


## 2.1.2 STOP+FRISK

*# Stop+frisk incidents*

```
options(repr.plot.width=14, repr.plot.height=10)
```

```
ggplot() +  
  geom_sf(data=tracts, colour='bisque3', fill='bisque') +  
  geom_sf(data=BOROUGH, colour='black', fill=NA) +  
  geom_sf(data=sqf[sqf$YEAR2==2019,], aes(col=SUSPECT_RACE_DESCRIPTION), alpha=.2,  
  size=1) +  
  with(as.list(st_bbox(sqf)), coord_sf(xlim=c(xmin,xmax), ylim=c(ymin,ymax))) +  
  guides(colour = guide_legend(override.aes=list(alpha=1, size=10))) +  
  ggtitle('Stop+frisk incidents in 2019') +  
  theme_bw(base_size=16) +  
  theme(panel.background = element_rect(fill='azure'))
```

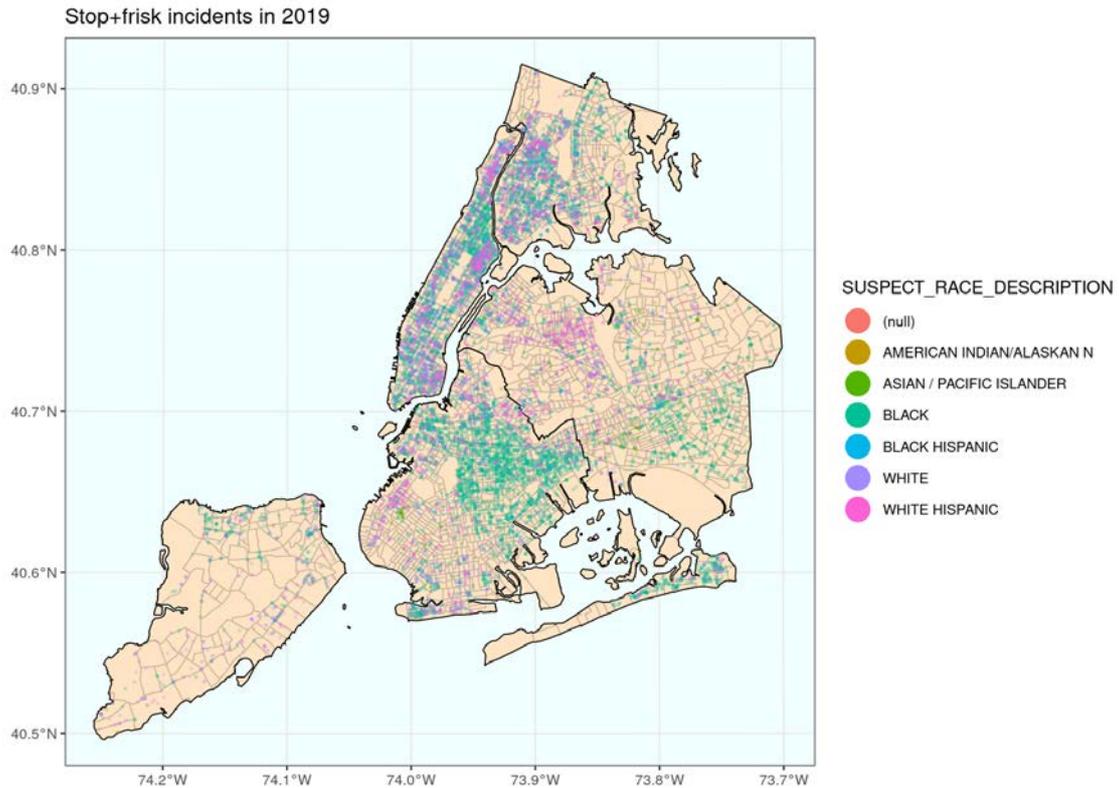

## 2.1.3 SURVEILLANCE


*# Public camera locations*

```
options(repr.plot.width=10.4, repr.plot.height=10)
```

```
camera_coverage <- st_union(st_buffer(camera[camera$public,], dist=CAMERA_RADIUS))
```

```
ggplot() +
  geom_sf(data=tracts, colour='bisque3', fill='bisque') +
  geom_sf(data=BOROUGH, colour='black', fill=NA) +
  geom_sf(data=camera_coverage, fill='firebrick3', alpha=.4) +
  with(as.list(st_bbox(sqf)), coord_sf(xlim=c(xmin,xmax), ylim=c(ymin,ymax))) +
  ggtitle(paste('Public cameras with',format(CAMERA_RADIUS),'radius')) +
  theme_bw(base_size=16) +
  theme(panel.background=element_rect(fill='azure'))
```

Public cameras with 120 [m] radius

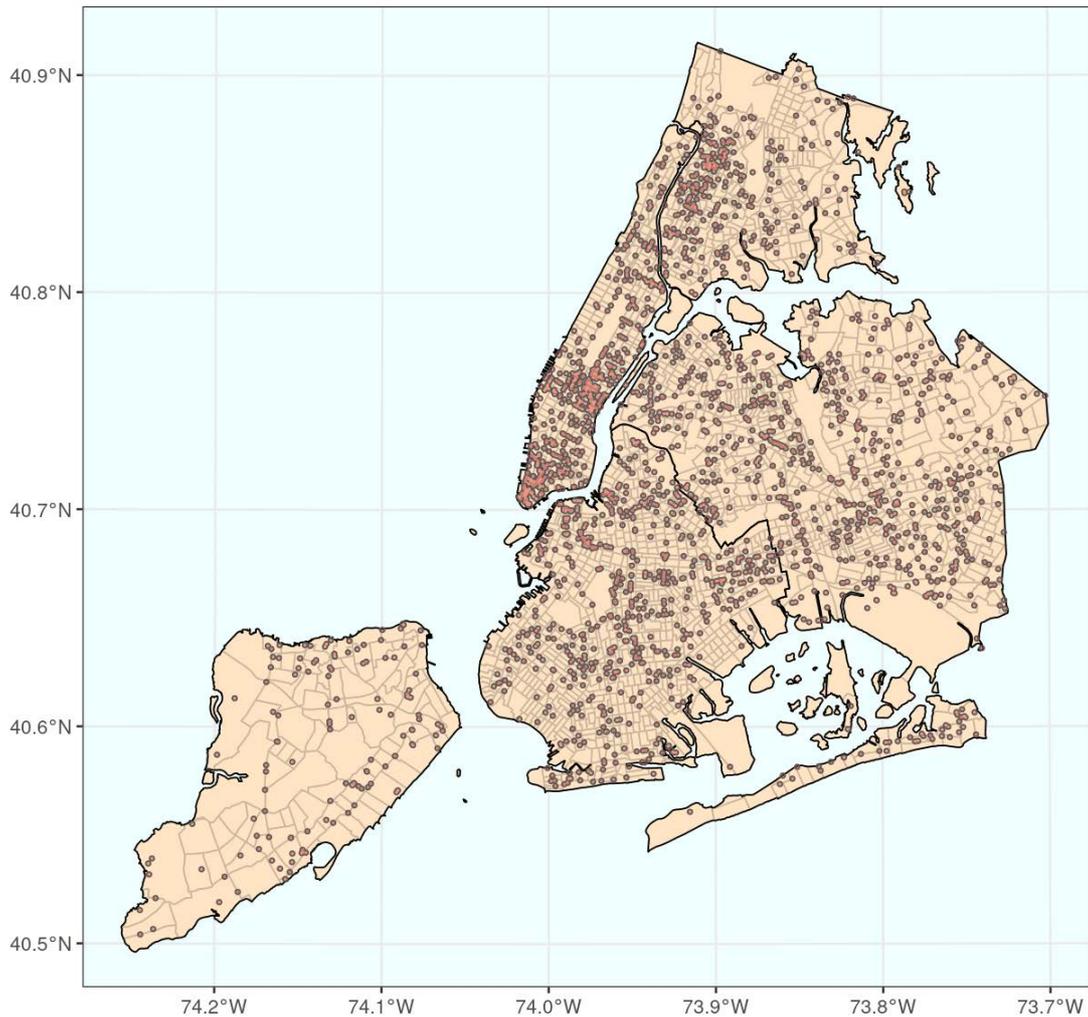

## 2.1.4 SURVEILLANCE / POPULATION

*# Which tracts have the highest surveillance levels?  
 # (surveillance level = effective number of cameras per 1000 residents)  
 # Only look at tracts with popn > 250, to exclude non-residential areas.*

```
df <- merge(census, camera_count, by='GEOID', all=TRUE)
df[, surv := eff_cameras / popn * 1000]
df[, surv_rank := rank(-surv), by=popn>250]
df[, surv_class := ifelse(popn>250, ifelse(surv_rank<=20,'top20','other'), NA)]
df <- merge(tracts[,c('GEOID','NAMELSAD','borough')], df, by='GEOID', all=TRUE)
st_agr(df) <- 'constant'
# Get a Google Maps url for the centroid of the tract
df2 <- st_centroid(df[, 'GEOID'])
df2 <- st_transform(df2, crs='epsg:4326')
df2 <- cbind(data.table(GEOID=df2$GEOID), st_coordinates(df2))
df2[, url := paste0('http://maps.google.com/maps?z=12&t=m&q=loc:',Y,'+',X)]
df <- merge(df, df2[, list(GEOID,url)], by='GEOID', all=TRUE)


options(repr.plot.width=20.8, repr.plot.height=20)

ggplot() +
  geom_sf(data=df, aes(fill=surv_class), colour='bisque3') +
```

```

geom_sf(data=BOROUGH, colour='black', fill=NA) +
scale_fill_manual(values=c('top20'='red', 'other'='bisque2'), na.value='antiquewhite') +
with(as.list(st_bbox(sqf)), coord_sf(xlim=c(xmin,xmax), ylim=c(ymin,ymax))) +
ggtitle('Top 20 tracts with highest surveillance') +
theme_bw(base_size=16) +
theme(panel.background=element_rect(fill='azure'))

```

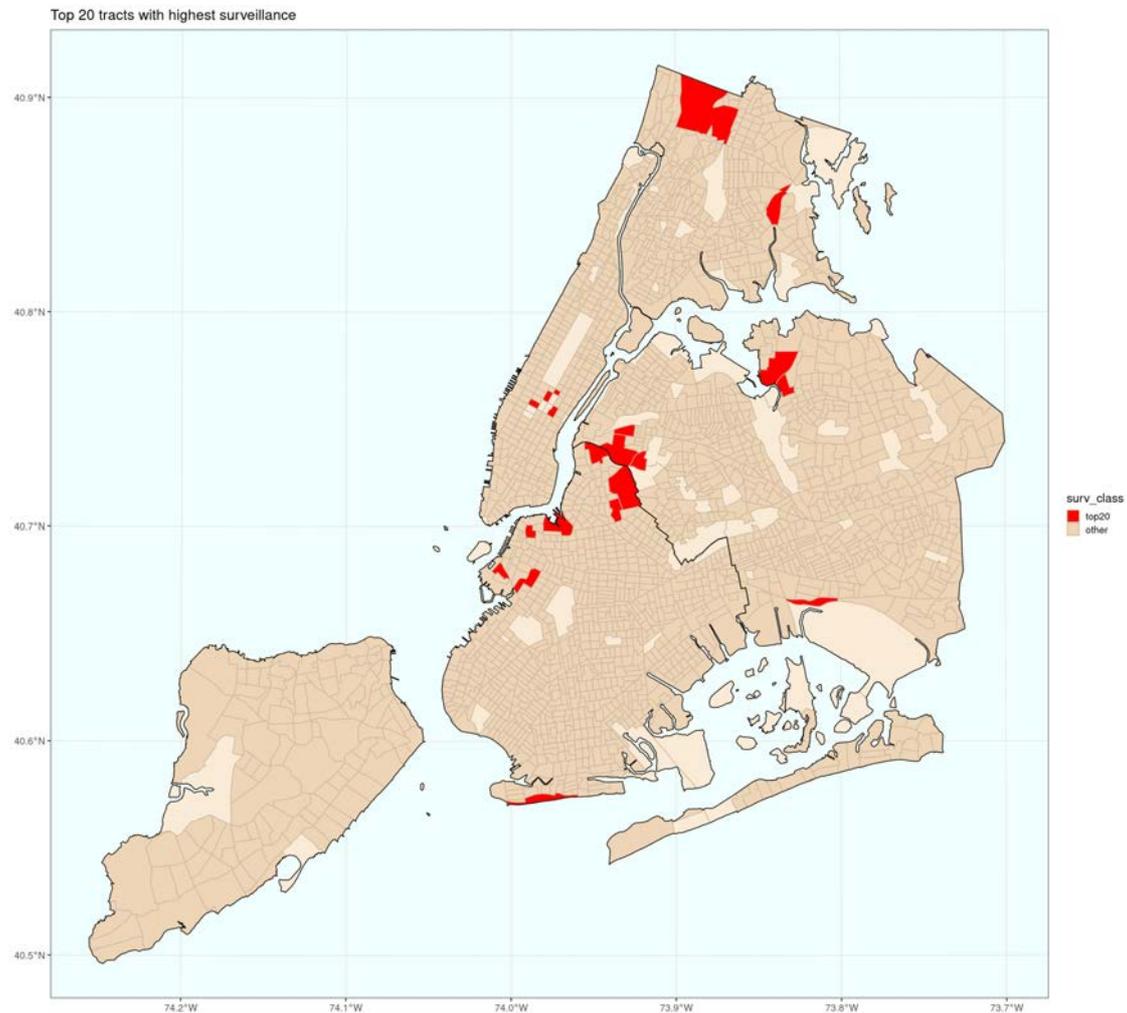

*# The top 50 most surveilled census tracts (excluding those with popn <= 250)*

```

as.data.table(df)[popn>250 & surv_rank<=50][order(surv_rank), list(GEOID,NAMELSAD,
borough,popn,eff_cameras,surv_rank,url)]

```

| surv_rank | GEOID       | NAMELSAD            | borough   | popn | eff_cameras |
|-----------|-------------|---------------------|-----------|------|-------------|
| 1         | 36047054300 | Census Tract 543    | Brooklyn  | 283  | 2.4232144   |
| 2         | 36081019900 | Census Tract 199    | Queens    | 697  | 4.9148482   |
| 3         | 36081017900 | Census Tract 179    | Queens    | 1019 | 4.7119249   |
| 4         | 36061011202 | Census Tract 112.02 | Manhattan | 415  | 1.6862763   |
| 5         | 36081090700 | Census Tract 907    | Queens    | 1434 | 5.7624049   |
| 6         | 36081084602 | Census Tract 846.02 | Queens    | 925  | 3.5133866   |

|    |             |                      |           |      |           |
|----|-------------|----------------------|-----------|------|-----------|
| 7  | 36005028400 | Census Tract 284     | Bronx     | 554  | 1.5409576 |
| 8  | 36047044900 | Census Tract 449     | Brooklyn  | 3210 | 8.9022172 |
| 9  | 36061011900 | Census Tract 119     | Manhattan | 1071 | 2.9550138 |
| 10 | 36061010400 | Census Tract 104     | Manhattan | 811  | 2.1815545 |
| 11 | 36061009200 | Census Tract 92      | Manhattan | 1474 | 3.9182786 |
| 12 | 36047057900 | Census Tract 579     | Brooklyn  | 1165 | 3.0745038 |
| 13 | 36005043500 | Census Tract 435     | Bronx     | 499  | 1.2030816 |
| 14 | 36047011900 | Census Tract 119     | Brooklyn  | 1322 | 3.0205297 |
| 15 | 36047035200 | Census Tract 352     | Brooklyn  | 1254 | 2.8244718 |
| 16 | 36081086900 | Census Tract 869     | Queens    | 1771 | 3.8132589 |
| 17 | 36081020500 | Census Tract 205     | Queens    | 1176 | 2.3714092 |
| 18 | 36047005900 | Census Tract 59      | Brooklyn  | 1213 | 2.4192464 |
| 19 | 36047001300 | Census Tract 13      | Brooklyn  | 1917 | 3.7913915 |
| 20 | 36047048500 | Census Tract 485     | Brooklyn  | 2289 | 4.5043668 |
| 21 | 36047109800 | Census Tract 1098    | Brooklyn  | 2359 | 4.3413446 |
| 22 | 36061003700 | Census Tract 37      | Manhattan | 2666 | 4.7583208 |
| 23 | 36081008500 | Census Tract 85      | Queens    | 883  | 1.5557916 |
| 24 | 36005006300 | Census Tract 63      | Bronx     | 4582 | 7.7866877 |
| 25 | 36061000900 | Census Tract 9       | Manhattan | 1796 | 2.9950564 |
| 26 | 36005011700 | Census Tract 117     | Bronx     | 1443 | 2.3350008 |
| 27 | 36047001800 | Census Tract 18      | Brooklyn  | 1897 | 3.0655438 |
| 28 | 36061019701 | Census Tract 197.01  | Manhattan | 639  | 1.012544  |
| 29 | 36081029300 | Census Tract 293     | Queens    | 1090 | 1.6693786 |
| 30 | 36005001900 | Census Tract 19      | Bronx     | 3141 | 4.772945  |
| 31 | 36061004500 | Census Tract 45      | Manhattan | 980  | 1.4861464 |
| 32 | 36061011203 | Census Tract 112.03  | Manhattan | 1103 | 1.6466061 |
| 33 | 36061001300 | Census Tract 13      | Manhattan | 4455 | 6.6253457 |
| 34 | 36061003100 | Census Tract 31      | Manhattan | 2525 | 3.6979451 |
| 35 | 36061011401 | Census Tract 114.01  | Manhattan | 1173 | 1.6631851 |
| 36 | 36081020800 | Census Tract 208     | Queens    | 3136 | 4.3191795 |
| 37 | 36081003300 | Census Tract 33      | Queens    | 3569 | 4.8857703 |
| 38 | 36061010100 | Census Tract 101     | Manhattan | 1373 | 1.8746598 |
| 39 | 36047003500 | Census Tract 35      | Brooklyn  | 1907 | 2.5967407 |
| 40 | 36061012500 | Census Tract 125     | Manhattan | 2311 | 3.1256031 |
| 41 | 36047036700 | Census Tract 367     | Brooklyn  | 1281 | 1.7225404 |
| 42 | 36061010000 | Census Tract 100     | Manhattan | 1741 | 2.3397171 |
| 43 | 36047004700 | Census Tract 47      | Brooklyn  | 1877 | 2.4798944 |
| 44 | 36047079400 | Census Tract 794     | Brooklyn  | 1716 | 2.2276285 |
| 45 | 36081042600 | Census Tract 426     | Queens    | 477  | 0.6125966 |
| 46 | 36081066300 | Census Tract 663     | Queens    | 2771 | 3.5518514 |
| 47 | 36081148300 | Census Tract 1483    | Queens    | 2900 | 3.6298691 |
| 48 | 36061009900 | Census Tract 99      | Manhattan | 5981 | 7.3855809 |
| 49 | 36081140901 | Census Tract 1409.01 | Queens    | 990  | 1.2021309 |
| 50 | 36005028600 | Census Tract 286     | Bronx     | 1085 | 1.3108964 |

| surv_rank | ur1   |
|-----------|---|
| 1         | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7009021108811+-73.9711860731856">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7009021108811+-73.9711860731856</a> |
| 2         | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7351969475049+-73.9340362079201">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7351969475049+-73.9340362079201</a> |
| 3         | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7446892921271+-73.9302772957279">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7446892921271+-73.9302772957279</a> |
| 4         | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7626039615687+-73.9721311338371">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7626039615687+-73.9721311338371</a> |
| 5         | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7742445733847+-73.8380630268819">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7742445733847+-73.8380630268819</a> |
| 6         | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6651262013001+-73.8165808751078">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6651262013001+-73.8165808751078</a> |
| 7         | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.8494364375106+-73.8386905127224">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.8494364375106+-73.8386905127224</a> |
| 8         | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.717832474392+-73.9310189503987">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.717832474392+-73.9310189503987</a>   |
| 9         | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7573151200653+-73.9860246553007">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7573151200653+-73.9860246553007</a> |
| 10        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7607790857575+-73.9776728684315">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7607790857575+-73.9776728684315</a> |
| 11        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7536475785273+-73.9747422230935">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7536475785273+-73.9747422230935</a> |
| 12        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7343632301197+-73.9484579099195">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7343632301197+-73.9484579099195</a> |
| 13        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.8945006565832+-73.8819835591425">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.8945006565832+-73.8819835591425</a> |
| 14        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6753263429599+-73.9898082191175">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6753263429599+-73.9898082191175</a> |
| 15        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.5733064393004+-73.9812868769882">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.5733064393004+-73.9812868769882</a> |
| 16        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7653527115675+-73.8336673547186">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7653527115675+-73.8336673547186</a> |
| 17        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7303893338009+-73.9218036203629">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7303893338009+-73.9218036203629</a> |
| 18        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6794027860982+-74.0061192594526">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6794027860982+-74.0061192594526</a> |
| 19        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6976149764291+-73.9883585864722">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6976149764291+-73.9883585864722</a> |
| 20        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.707839855891+-73.9363493490845">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.707839855891+-73.9363493490845</a>   |
| 21        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6526617235089+-73.9016506102304">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6526617235089+-73.9016506102304</a> |
| 22        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.726278095626+-74.0075034204877">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.726278095626+-74.0075034204877</a>   |
| 23        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7600215165174+-73.940722322593">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7600215165174+-73.940722322593</a>   |
| 24        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.8238506185581+-73.9283912087115">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.8238506185581+-73.9283912087115</a> |
| 25        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7023246877833+-74.0098565139476">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7023246877833+-74.0098565139476</a> |
| 26        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.8105018153381+-73.8766835274815">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.8105018153381+-73.8766835274815</a> |
| 27        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6553358361173+-74.0132794525594">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6553358361173+-74.0132794525594</a> |
| 28        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.80531104441+-73.9593993468251">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.80531104441+-73.9593993468251</a>     |
| 29        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7519326725642+-73.8994830070836">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7519326725642+-73.8994830070836</a> |
| 30        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.8030405682337+-73.9146080116714">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.8030405682337+-73.9146080116714</a> |
| 31        | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7205701206259+-73.9993912050248">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7205701206259+-73.9993912050248</a> |

|    |   |
|----|---|
| 32 | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7612443989067+-73.9689142454845">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7612443989067+-73.9689142454845</a> |
| 33 | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7091259661897+-74.0129925082366">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7091259661897+-74.0129925082366</a> |
| 34 | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7153109519573+-74.0038150937813">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7153109519573+-74.0038150937813</a> |
| 35 | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7648402252091+-73.9704938939059">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7648402252091+-73.9704938939059</a> |
| 36 | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6983846475047+-73.8068861371267">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6983846475047+-73.8068861371267</a> |
| 37 | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.75438447924+-73.9380995999987">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.75438447924+-73.9380995999987</a>     |
| 38 | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7497314080164+-73.9915412167347">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7497314080164+-73.9915412167347</a> |
| 39 | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6853251969354+-73.9761802762101">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6853251969354+-73.9761802762101</a> |
| 40 | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7598407190052+-73.9841752446922">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7598407190052+-73.9841752446922</a> |
| 41 | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6775645923497+-73.9046130106438">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6775645923497+-73.9046130106438</a> |
| 42 | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7580652720345+-73.9712318119244">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7580652720345+-73.9712318119244</a> |
| 43 | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6883701898338+-74.0018565551786">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6883701898338+-74.0018565551786</a> |
| 44 | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.648605301847+-73.9552860107495">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.648605301847+-73.9552860107495</a>   |
| 45 | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6888726143057+-73.7702024656798">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.6888726143057+-73.7702024656798</a> |
| 46 | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7211189613178+-73.8773457274675">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7211189613178+-73.8773457274675</a> |
| 47 | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7744932566264+-73.7492503275423">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7744932566264+-73.7492503275423</a> |
| 48 | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7520190332368+-74.0049130132931">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7520190332368+-74.0049130132931</a> |
| 49 | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7465404582977+-73.7749009383578">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.7465404582977+-73.7749009383578</a> |
| 50 | <a href="http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.8491849054577+-73.8477751648193">http://maps.google.com/maps?z=12&amp;t=m&amp;q=loc:40.8491849054577+-73.8477751648193</a> |

## 2.2 THE NUMBER OF STOP+FRISK INCIDENTS IS CLOSELY LINKED TO THE LEVEL OF SURVEILLANCE

We first analyze how the number of stop+frisk incidents depends on the number of cameras. The underlying statistical model we'll use is a generalized linear model,

$$\text{average num.stops in tract} = \lambda \times \text{tract.popn}/1000,$$

Here  $\lambda$  is the rate of stop+frisk incidents per 1000 population, and the focus of the analysis is to understand how  $\lambda$  depends on level of surveillance.

Furthermore, we'll model the actual number of stops as a Poisson random variable, with mean as specified above. This is a standard statistical model for analyzing count data.

We split the tracts into 9 groups, according to level of surveillance, and estimate  $\lambda$  separately for each group. (This allows us to assess the relationship between stop+frisk and surveillance, without assuming any particular form of the equation.) For this analysis, surveillance level is defined as the effective number of cameras within 200m of a given census tract, per 1000 residents. We see that the stop+frisk rate  $\lambda$  increases with the level of surveillance, and the relationship is roughly linear.

Our analysis uses data for 2019. We restrict attention to census tracts with a population of >250, as a simple way to exclude parks etc.

```
df <- as.data.table(expand.grid(GEOID=unique(census$GEOID), YEAR2=unique(sqf$YEAR2)))
```

```

df <- merge(df, as.data.table(sqf)[, list(numstops=.N), by=list(GEOID, YEAR2)], all=
TRUE) # numstops per tract, year
df <- merge(df, census, by='GEOID', all=TRUE) # popn, popn.black, popn.hispanic, po
pn.white
df <- merge(df, camera_count, by='GEOID', all=TRUE) # eff_cameras_within_200m and o
ther counts
df <- merge(df, as.data.table(st_drop_geometry(tracts))[, list(GEOID, borough)], by
='GEOID', all=TRUE) # borough
df[is.na(numstops), numstops := 0] # for the tracts with no recorded stops

# Let stoprate = number of stops per 1000 residents in a census tract
# Let surv by the effective number of cameras within 200m of the tract, per 1000 re
sidents

df[, stoprate := numstops/popn*1000]
df[, surv := eff_cameras_within_200m/popn*1000]

# For a non-parametric model, it's useful to split the tracts into separate groups
# according to surveillance level. Let survF be a split version of surv.

breaks <- c(seq(0,1.5,by=.25), 2, 3)
break_midpoint <- c((tail(breaks,-1) + head(breaks,-1)) / 2, 3.5)
df[, survF := cut(surv, breaks=c(breaks,Inf), labels=break_midpoint, include.lowest
=TRUE)]
breaks

[1] 0.00 0.25 0.50 0.75 1.00 1.25 1.50 2.00 3.00


# Estimate  $\lambda$  as a function of level of surveillance (using survF, our discretized v
ersion
# of level-of-surveillance). The plot shows the estimates for  $\lambda$  as well as 95% conf
idence
# intervals, for each surveillance level.

fit <- glm(numstops ~ 0 + survF, offset=log(popn/1000),
          data=df[popn>250 & YEAR2==2019],
          family='poisson')
x <- as.data.table(coef(summary(fit)))
x[, stoprate := exp(Estimate)]
x[, lo := exp(Estimate-1.96*`Std. Error`)]
x[, hi := exp(Estimate+1.96*`Std. Error`)]
x[, 'survF' := levels(df$survF)]

options(repr.plot.width=6, repr.plot.height=4)

ggplot(data=x) +
  geom_errorbar(aes(x=as.numeric(survF), ymin=lo, ymax=hi)) +
  geom_line(aes(x=as.numeric(survF), y=stoprate), colour='red') +
  xlab('surveillance level') + ylab('') +
  ggtitle('Estimated stop+frisk per 1000 popn') +
  coord_cartesian(ylim=c(1,3))

```

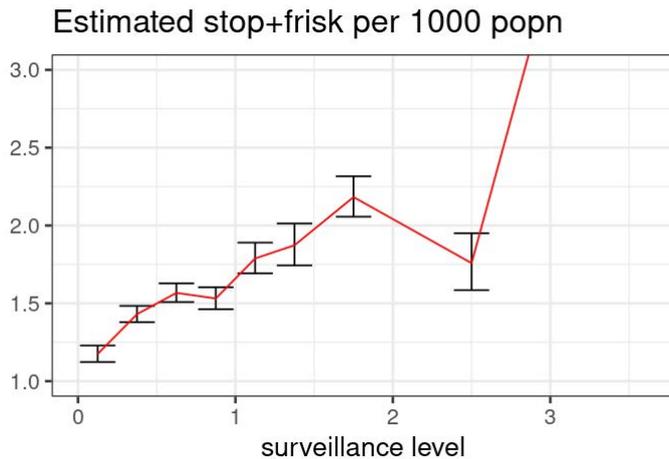

## 2.2.1 SANITY CHECKS


Here are some plots that support the underlying statistical model described above.

The first plot shows that the stop+frisk rate (number of stops per 1000 residents) grows with the surveillance level. This plot is very noisy.

The second and third plots show why there is so much noise. The actual number of stops in a given census tract is a small integer, mostly in the range 0-10, and so there is bound to be lots of noise in the data for a single census tract. The second plot supports the idea that the number of stop+frisk incidents is proportional to population, and the third plot is consistent with a Poisson model.

```
options(repr.plot.width=8, repr.plot.height=4)
```


```
ggplot(data=df[popn>250 & YEAR2==2019], aes(y=numstops/popn*1000, x=eff_cameras_wit
hin_200m/popn*1000)) +
  geom_point(aes(size=popn), alpha=.3) +
  geom_smooth(method='loess', colour='red', formula=y~x) +
  scale_size_area() +
  coord_cartesian(xlim=c(0,4), ylim=c(0,5)) +
  ggtitle('Stop rate (2019), as a function of surveillance')
```

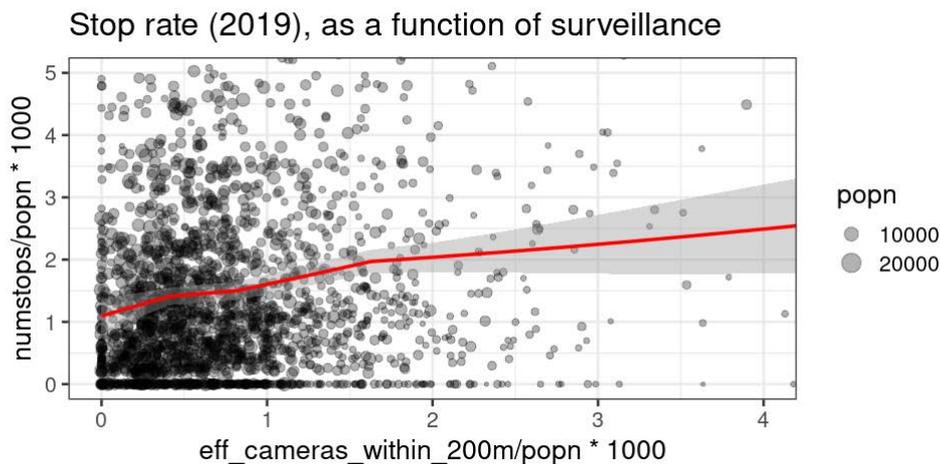

```
options(repr.plot.width=6, repr.plot.height=4)
```


```
ggplot(data=df[popn>250 & YEAR2==2019], aes(x=popn, y=numstops)) +
  geom_point(alpha=.5) +
```

```
geom_smooth(method='loess', colour='red', formula=y~x) +
coord_cartesian(xlim=c(0,15000), ylim=c(0,35))
```

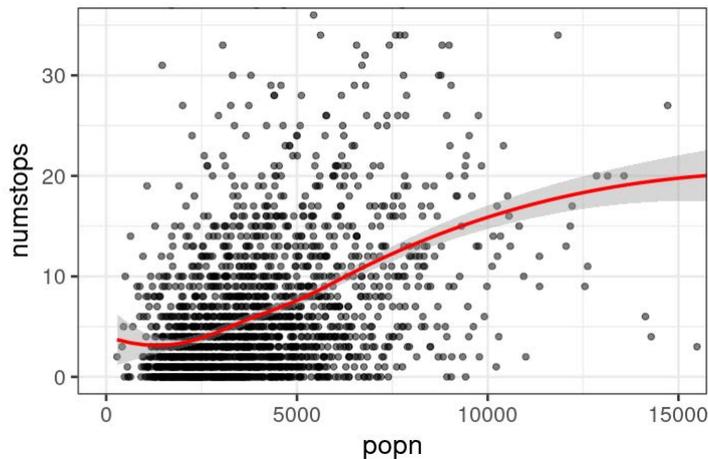

```
options(repr.plot.width=7, repr.plot.height=4)
```

```
ggplot(data=df[YEAR2==2019]) +
  geom_histogram(aes(x=numstops), colour='white', breaks=seq(-.5,40,by=1))
```

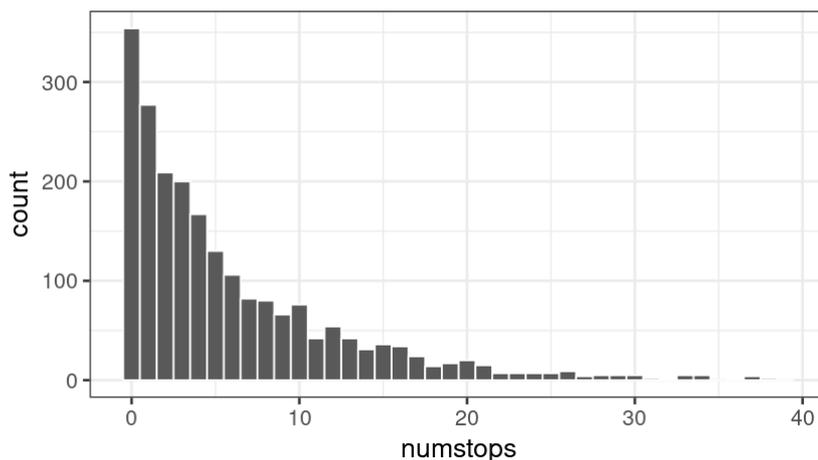

## 2.3 STOP+FRISK RATES ALSO VARY WITH RACIAL MIX, ON TOP OF THE LINK TO SURVEILLANCE

What else does the stop+frisk rate depend on? As before we consider the model

$$\text{average num.stops in tract} = \lambda \times \text{tract.popn}/1000$$

and we investigate what  $\lambda$  depends on. Our baseline model is a simple generalized linear model,

$$\log \lambda = \alpha + \beta \times \text{surveillance.level} + \gamma \times \text{nonwhite.fraction}$$

where  $\alpha$ ,  $\beta$ ,  $\gamma$ , are coefficients to be estimated from the data.

Unsurprisingly, the coefficient for surveillance level (defined as effective number of cameras within 200m of the tract per 1000 residents) is positive, and highly significant (coef=0.02, p<0.001, for Queens in 2019).

The coefficient for nonwhite.fraction (defined as the fraction of residents who identify as Black or Hispanic, out of those who identify as Black or Hispanic or White) is also positive, and highly significant (coef=0.83, p<0.001, for Queens in 2019).

The  $\beta$  and  $\gamma$  coefficients vary from borough to borough, and they are consistent from 2019 to 2020. (See the chart below for the coefficient values and 95% confidence intervals.) They are consistently positive, and consistently significant.

The fact that both  $\beta$  and  $\gamma$  are highly significant shows that they are not confounding each other. In other words, it is *not* the case that variation in stop+frisk due to surveillance level is entirely explained by the racial mix.

## 2.3.1 SANITY CHECKS

We developed the baseline model using data from a single borough (Queens), to avoid overfitting.

- We tested for a non-linear dependence on surveillance level, but it is not significant.
- We also tested a model with separate coefficients for black.fraction and hispanic.fraction, but the difference between these coefficients is not significant. For all our analyses below, we have therefore pooled Black and Hispanic populations.
- We also tested for an interaction between surveillance.level and nonwhite.fraction. It was not significant. (We might expect we'd need more data to estimate an interaction effect, so we also tried pooling four boroughs excluding Manhattan, and also pooling all five boroughs. It remains not significant in both cases.)

```
df <- as.data.table(expand.grid(GEOID=unique(census$GEOID), YEAR2=unique(sqf$YEAR2)
))
df <- merge(df, as.data.table(sqf)[, list(numstops=.N), by=list(GEOID,YEAR2)], all=
TRUE) # numstops per tract,year
df <- merge(df, census, by='GEOID', all=TRUE) # popn, popn.black, popn.hispanic, po
pn.white
df <- merge(df, camera_count, by='GEOID', all=TRUE) # eff_cameras_within_200m and o
ther counts
df <- merge(df, as.data.table(st_drop_geometry(tracts))[, list(GEOID, borough)], by
='GEOID', all=TRUE) # borough
df[is.na(numstops), numstops := 0] # for the tracts with no recorded stops

# Let stoprate = number of stops per 1000 residents in a census tract
# Let surv by the effective number of cameras within 200m of the tract, per 1000 re
sidents

df[, stoprate := numstops/popn*1000]
df[, surv := eff_cameras_within_200m/popn*1000]
df[, nonwhite_fraction := (popn.black + popn.hispanic) / (popn.black + popn.hispani
c + popn.white)]

# The baseline model
fit0 <- glm(numstops ~ surv + nonwhite_fraction, offset=log(popn),
family='poisson',
data=df[YEAR2==2019 & borough=='Queens'],
subset=popn>250)

# Baseline model sanity check. Is it reasonable to assume a linear dependence on su
rv?
# Is it reasonable to pool Black and Hispanic?

fit1 <- update(fit0, . ~ . + I(surv^2) + I(popn.black/popn))
summary(fit1)
```

Call:

```
glm(formula = numstops ~ surv + nonwhite_fraction + I(surv^2) +
I(popn.black/popn), family = "poisson", data = df[YEAR2 ==
2019 & borough == "Queens"], subset = popn > 250, offset = log(popn))
```

Deviance Residuals:

|  | Min     | 1Q      | Median  | 3Q     | Max    |
|--|---------|---------|---------|--------|--------|
|  | -3.7321 | -1.6934 | -0.5816 | 0.6344 | 7.4685 |

Coefficients:

|                    | Estimate  | Std. Error | z value  | Pr(> z ) |     |
|--------------------|-----------|------------|----------|----------|-----|
| (Intercept)        | -7.538773 | 0.065070   | -115.856 | < 2e-16  | *** |
| surv               | 0.204248  | 0.035519   | 5.750    | 8.90e-09 | *** |
| nonwhite_fraction  | 0.832449  | 0.116499   | 7.146    | 8.96e-13 | *** |
| I(surv^2)          | -0.004956 | 0.003158   | -1.569   | 0.117    |     |
| I(popn.black/popn) | 0.087239  | 0.099152   | 0.880    | 0.379    |     |

---  
Signif. codes: 0 '\*\*\*' 0.001 '\*\*' 0.01 '\*' 0.05 '.' 0.1 ' ' 1

(Dispersion parameter for poisson family taken to be 1)

Null deviance: 2267.1 on 640 degrees of freedom  
Residual deviance: 2037.0 on 636 degrees of freedom  
AIC: 3614.9

Number of Fisher Scoring iterations: 5

*# Further sanity check. Is there any interaction between the surveillance term and the nonwhite\_fraction?  
# We'll use a simple binarized version of nonwhite\_fraction -- it's more robust to explore the question  
# non-parametrically in the first instance, than to assume a formula.*

```
df[, nwfc := cut(nonwhite_fraction, breaks=2)]
```

```
fit <- lm(stoprte ~ nwfc*surv,  
         weight=popn,  
         data=df,  
         subset=popn>250 & YEAR2==2019 & borough!='Manhattan')  
summary(fit)
```

Call:

```
lm(formula = stoprate ~ nwfc * surv, data = df, subset = popn >  
    250 & YEAR2 == 2019 & borough != "Manhattan", weights = popn)
```

Weighted Residuals:

|  | Min     | 1Q     | Median | 3Q    | Max    |
|--|---------|--------|--------|-------|--------|
|  | -174.08 | -51.15 | -19.24 | 28.41 | 831.22 |

Coefficients:

|                  | Estimate | Std. Error | t value | Pr(> t ) |     |
|------------------|----------|------------|---------|----------|-----|
| (Intercept)      | 0.52090  | 0.07330    | 7.106   | 1.71e-12 | *** |
| nwfc(0.5,1]      | 0.83911  | 0.09913    | 8.465   | < 2e-16  | *** |
| surv             | 0.52639  | 0.07327    | 7.185   | 9.78e-13 | *** |
| nwfc(0.5,1]:surv | 0.04881  | 0.09851    | 0.495   | 0.62     |     |

---  
Signif. codes: 0 '\*\*\*' 0.001 '\*\*' 0.01 '\*' 0.05 '.' 0.1 ' ' 1

Residual standard error: 87.59 on 1823 degrees of freedom  
Multiple R-squared: 0.1434, Adjusted R-squared: 0.142  
F-statistic: 101.7 on 3 and 1823 DF, p-value: < 2.2e-16

*# How do the coefficients vary from year to year, and borough to borough?*

```
resdf <- as.data.table(expand.grid(YEAR2=unique(df$YEAR2), borough=unique(df$boroug  
h)))
```


```

resdf <- mapply(resdf$YEAR2, resdf$borough, SIMPLIFY=FALSE, FUN=function(y,b) {
  fit <- update(fit0, data=df[YEAR2==y & borough==b])
  x <- coef(summary(fit))
  data.table(YEAR2=y, borough=b, coef=dimnames(x)[[1]], Estimate=x[, 'Estimate'], se
=x[, 'Std. Error'])
})
resdf <- do.call(rbind, resdf)
resdf[, year := factor(YEAR2)]

options(repr.plot.width=14, repr.plot.height=5)

ggplot(data=resdf[coef!='(Intercept)']) +
  geom_vline(xintercept=0, size=1, color='black') +
  geom_errorbarh(aes(xmin=Estimate-1.96*se, xmax=Estimate+1.96*se, y=borough, col=year),
  position=position_dodge(0.3)) +
  geom_point(aes(x=Estimate, y=borough, col=year), position=position_dodge(0.3)) +
  facet_wrap(~coef, scales='free_x') +
  theme_bw() + theme(text=element_text(size=20)) +
  ggtitle('Coefficient estimates (with 95% confint)') +
  xlab('coefficient of increased stoprate')

```

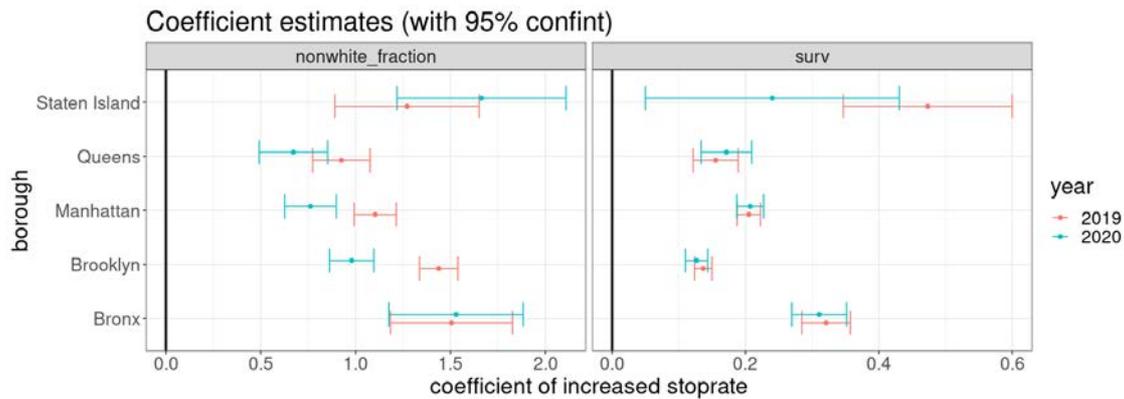

## 2.4 HOW DOES SURVEILLANCE DEPEND ON DEMOGRAPHICS ETC.?

We have seen that stop+frisk rates depend separately on surveillance level and on the proportion of nonwhite residents. We now investigate what surveillance level depends on.

For these analyses we'll measure surveillance level by effective number of cameras per 1000 residents in a census tract. As before we assign each camera a radius of 120m, and we measure the total area visible, then divide by the area visible by a single camera. In this section we're analysing the attributes of each area of the city, so we'll measure the area surveilled within each census tract (`eff_cameras/popn`). This in contrast to the earlier analyses of stop+frisk counts, where we analysed the attributes of residents, and we measured the area surveilled within a neighbourhood of the census tract (`eff_cameras_within_200m/popn`).

- In Manhattan, the higher nonwhite\_fraction, the lower the level of surveillance ( $p < 0.001$ ).
- In Bronx ( $p = 0.053$ ), Brooklyn ( $p = 0.027$ ), and Queens ( $p = 0.015$ ), the higher the nonwhite\_fraction, the higher the level of surveillance
- In Staten Island, no significant relationship ( $p = 0.082$ ).

When we take account of poverty (`. ~ . + borough:med.income`), the findings point in the same direction, though they are less significant. This suggests there is some degree of confounding, since there is more poverty linked with greater proportion of nonwhite residents.

Manhattan is most likely a special case: it's a transport hub, so there are many non-resident occupants, and policing e.g. surveillance may well be linked to the number of occupants rather than residents.

## 2.4.1 MODEL CHOICE

The analyses are based on logistic regression. Surveillance level is most definitely non-Gaussian (it's truncated at zero -- see the histogram below), so it's not sound to fit a linear regression. Instead, we have binarized it into low versus high, with a threshold of 0.18 cameras per 1000 residents (close to the median). This is a simple way to get robust results.

Our baseline model is

$$\text{logitProb}(\text{high}) = \alpha_{\text{borough}} + \beta_{\text{borough}} \times \text{nonwhite\_fraction}$$

and we are interested in the  $\beta$  coefficients, one for each borough.

```
df <- merge(census, camera_count, by='GEOID', all=TRUE)
df <- merge(df, as.data.table(st_drop_geometry(tracts))[, list(GEOID, borough)], by
='GEOID', all=TRUE)
df[, nonwhite_fraction := (popn.black + popn.hispanic) / (popn.black + popn.hispani
c + popn.white)]
df[, surv := eff_cameras / popn * 1000]
df[, survF := ifelse(surv < quantile(surv, 2/3, na.rm=TRUE), 'low', 'high')]
```

```
SURV_THRESHOLD <- 0.2
```

```
# The baseline model
```

```
fit <- glm(surv > SURV_THRESHOLD ~ 0 + borough + borough:nonwhite_fraction,
          data=df, subset=popn>250,
          family='binomial')
summary(fit)
```

Call:

```
glm(formula = surv > SURV_THRESHOLD ~ 0 + borough + borough:nonwhite_fraction,
    family = "binomial", data = df, subset = popn > 250)
```

Deviance Residuals:

```
      Min       1Q   Median       3Q      Max
-1.5946 -1.0872 -0.8329  1.1893  1.8189
```

Coefficients:

|  | Estimate | Std. Error | z value | Pr(> z ) |     |
|--|----------|------------|---------|----------|-----|
| boroughBronx                           | -1.6062  | 0.5452     | -2.946  | 0.00321  | **  |
| boroughBrooklyn                        | -0.5881  | 0.1384     | -4.249  | 2.15e-05 | *** |
| boroughManhattan                       | 0.3219   | 0.2016     | 1.597   | 0.11025  |     |
| boroughQueens                          | -0.1307  | 0.1747     | -0.748  | 0.45419  |     |
| boroughStaten Island                   | -0.3403  | 0.3307     | -1.029  | 0.30348  |     |
| boroughBronx:nonwhite_fraction         | 1.2966   | 0.6702     | 1.935   | 0.05301  | .   |
| boroughBrooklyn:nonwhite_fraction      | 0.5029   | 0.2268     | 2.217   | 0.02662  | *   |
| boroughManhattan:nonwhite_fraction     | -1.7864  | 0.4529     | -3.944  | 8.00e-05 | *** |
| boroughQueens:nonwhite_fraction        | 0.6958   | 0.2873     | 2.422   | 0.01545  | *   |
| boroughStaten Island:nonwhite_fraction | 1.6749   | 0.9642     | 1.737   | 0.08236  | .   |

```
---
```

```
Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

(Dispersion parameter for binomial family taken to be 1)

```
Null deviance: 2914.0 on 2102 degrees of freedom
Residual deviance: 2814.2 on 2092 degrees of freedom
AIC: 2834.2
```

Number of Fisher Scoring iterations: 4

```
# What if surveillance is related to poverty levels instead?  
# Doesn't Look Like it.
```

```
fit2 <- update(fit, . ~ . + med.income)  
summary(fit2)
```

Call:

```
glm(formula = surv > SURV_THRESHOLD ~ borough + med.income +  
     borough:nonwhite_fraction - 1, family = "binomial", data = df,  
     subset = popn > 250)
```

Deviance Residuals:

| Min     | 1Q      | Median  | 3Q     | Max    |
|---------|---------|---------|--------|--------|
| -1.5694 | -1.0901 | -0.8293 | 1.1998 | 1.8380 |

Coefficients:

|  | Estimate   | Std. Error | z value | Pr(> z )     |
|--|------------|------------|---------|--------------|
| boroughBronx                           | -1.504e+00 | 5.929e-01  | -2.537  | 0.011177 *   |
| boroughBrooklyn                        | -4.437e-01 | 2.076e-01  | -2.137  | 0.032564 *   |
| boroughManhattan                       | 5.941e-01  | 3.496e-01  | 1.699   | 0.089305 .   |
| boroughQueens                          | 1.157e-02  | 2.299e-01  | 0.050   | 0.959853     |
| boroughStaten Island                   | -1.356e-01 | 3.857e-01  | -0.352  | 0.725108     |
| med.income                             | -1.746e-06 | 1.810e-06  | -0.965  | 0.334749     |
| boroughBronx:nonwhite_fraction         | 1.270e+00  | 7.014e-01  | 1.811   | 0.070181 .   |
| boroughBrooklyn:nonwhite_fraction      | 4.358e-01  | 2.363e-01  | 1.845   | 0.065108 .   |
| boroughManhattan:nonwhite_fraction     | -2.038e+00 | 5.357e-01  | -3.804  | 0.000142 *** |
| boroughQueens:nonwhite_fraction        | 6.659e-01  | 2.885e-01  | 2.308   | 0.020982 *   |
| boroughStaten Island:nonwhite_fraction | 1.412e+00  | 9.828e-01  | 1.437   | 0.150747     |

---

Signif. codes: 0 '\*\*\*' 0.001 '\*\*' 0.01 '\*' 0.05 '.' 0.1 ' ' 1

(Dispersion parameter for binomial family taken to be 1)

Null deviance: 2898.7 on 2091 degrees of freedom  
Residual deviance: 2799.2 on 2080 degrees of freedom  
(11 observations deleted due to missingness)  
AIC: 2821.2

Number of Fisher Scoring iterations: 4

```
# We should consider unpacking %non-white into black & hispanic.  
# As before, there's no significant difference.
```

```
fit3 <- update(fit, . ~ . + I((popn.black - popn.hispanic)/popn))  
summary(fit3)
```

Call:

```
glm(formula = surv > SURV_THRESHOLD ~ borough + I((popn.black -  
     popn.hispanic)/popn) + borough:nonwhite_fraction - 1, family = "binomial",  
     data = df, subset = popn > 250)
```

Deviance Residuals:

| Min     | 1Q      | Median  | 3Q     | Max    |
|---------|---------|---------|--------|--------|
| -1.6017 | -1.0849 | -0.8297 | 1.1824 | 1.8063 |

Coefficients:

|              | Estimate | Std. Error | z value | Pr(> z )   |
|--------------|----------|------------|---------|------------|
| boroughBronx | -1.57222 | 0.54729    | -2.873  | 0.00407 ** |

```

boroughBrooklyn          -0.56567    0.14415   -3.924  8.70e-05 ***
boroughManhattan         0.32716    0.20178    1.621  0.10493
boroughQueens            -0.09321    0.18748   -0.497  0.61905
boroughStaten Island     -0.33022    0.33120   -0.997  0.31874
I((popn.black - popn.hispanic)/popn)  0.08104    0.14687    0.552  0.58110
boroughBronx:nonwhite_fraction  1.27483    0.66973    1.903  0.05698 .
boroughBrooklyn:nonwhite_fraction  0.43643    0.25669    1.700  0.08909 .
boroughManhattan:nonwhite_fraction -1.78229    0.45263   -3.938  8.23e-05 ***
boroughQueens:nonwhite_fraction  0.63678    0.30684    2.075  0.03796 *
boroughStaten Island:nonwhite_fraction  1.66227    0.96501    1.723  0.08497 .

```

---

Signif. codes: 0 '\*\*\*' 0.001 '\*\*' 0.01 '\*' 0.05 '.' 0.1 ' ' 1

(Dispersion parameter for binomial family taken to be 1)

Null deviance: 2914.0 on 2102 degrees of freedom  
Residual deviance: 2813.9 on 2091 degrees of freedom  
AIC: 2835.9

Number of Fisher Scoring iterations: 4

## 2.4.2 SANITY CHECKS AND DATA PLOTS

```

# Does the raw data support the link between nonwhite_fraction and higher surveillance?
# In Manhattan, it's abundantly obvious.
# In other boroughs, possibly yes, but it's a small signal and so it's not surprising
# we need formal statistics to pull it out.


```

```
options(repr.plot.width=7, repr.plot.height=12)
```

```

ggplot(data=df[popn>250], aes(x=(popn.black + popn.hispanic) / (popn.black + popn.hispanic + popn.white), y=surv)) +
  geom_point(aes(size=popn), alpha=.4) +
  geom_smooth(method='loess', col='red', size=2, formula=y~x) +
  facet_grid(borough~.) +
  scale_size_area() +
  coord_cartesian(ylim=c(0,.8)) +
  theme_bw(base_size=16) +
  xlab('% black or hispanic') + ylab('cameras per 1000 residents')


```

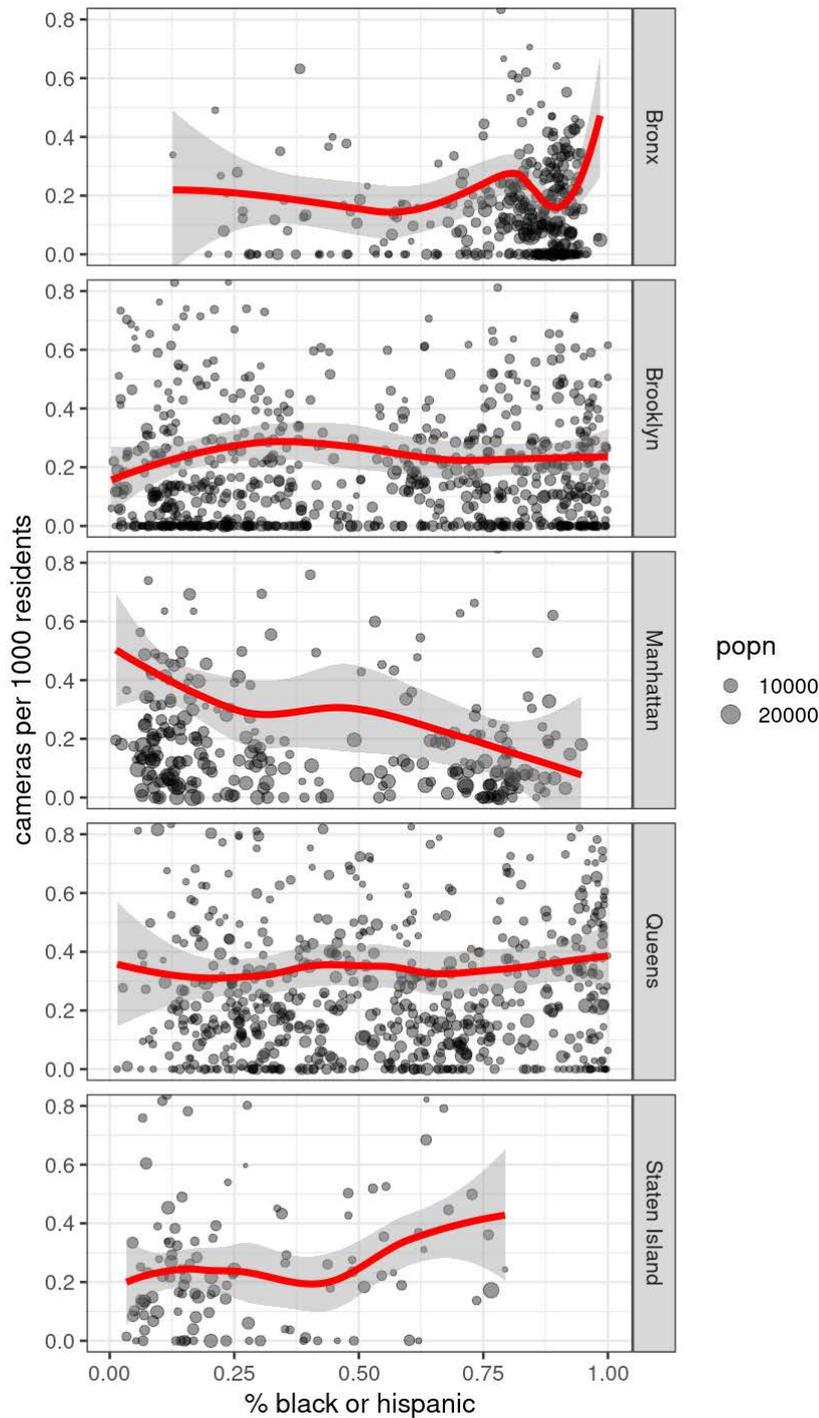

*# The distribution of `surv` is definitely non-Gaussian!  
 # It has a spike at surv=0, then something like a Gamma distribution, then some out  
 liers.  
 # It's not sound to fit a linear regression.  
 # That's why I've binarized surv, and fitted a logistic regression.*

```
options(repr.plot.width=12, repr.plot.height=6)
ggplot(data=df[popn>250 & surv<3]) + geom_histogram(aes(x=surv), bins=60) +
  ggtitle('Distribution of surveillance level (eff. cameras per 1000 residents)')
```

Distribution of surveillance level (eff. cameras per 1000 residents)

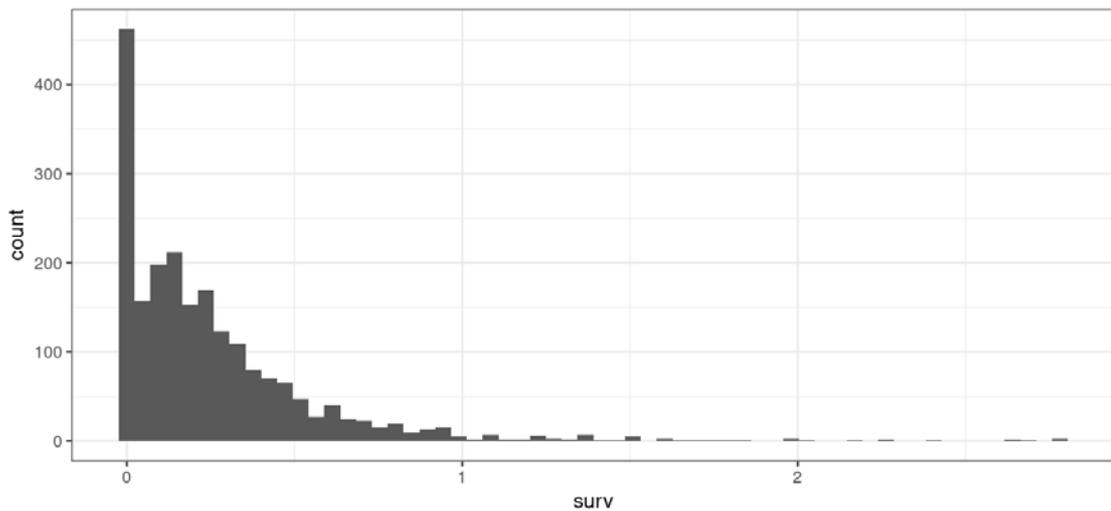


*# Map showing relationship between ethnic mix and surveillance.  
 # Which census tracts have a high level of surveillance?  
 # This is shown superimposed on nonwhite\_fraction.*

```
dft <- merge(tracts[, 'GEOID'], df, by='GEOID')

options(repr.plot.width=14, repr.plot.height=10)

ggplot() +
  geom_sf(data=dft, aes(fill=ifelse(popn>250, nonwhite_fraction, NA), alpha=survF), size=0) +
  scale_fill_gradient(limits=c(0,1), low='darkorange', high='cornflowerblue', na.value='grey90',
                     guide=guide_colorbar(title='nonwhite_fraction')) +
  scale_alpha_manual(values=c('high'=1, 'low'=0.4), guide="none") +
  ggtitle('Surveillance level (dark = top tercile of cameras per capita)') +
  theme_bw(base_size=16) +
  theme(panel.background = element_rect(fill='azure'))
```

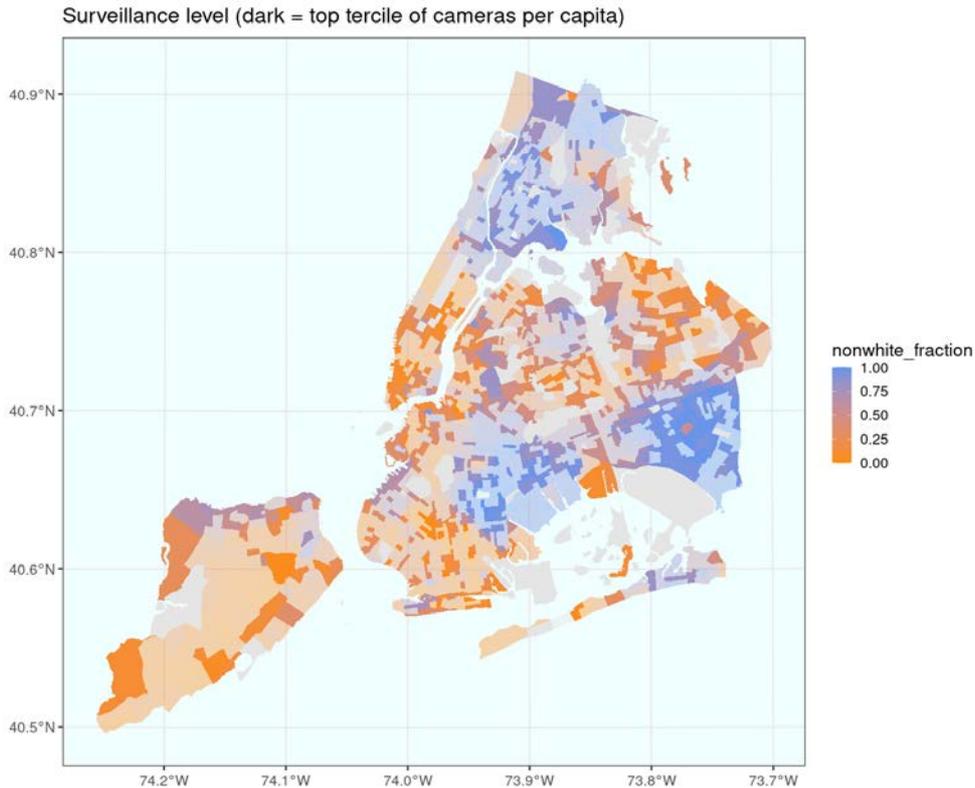

## 2.5 HOW ELSE DO STOP-AND-FRISK ACTIONS DEPEND ON SURVEILLANCE?

We have seen that the stop+frisk rate depends on surveillance level: the higher the surveillance level, the higher the rate. We now investigate this link in more granular detail.

### SUSPECTED CRIME DESCRIPTION.

Does the correlation between stop+frisk rate and surveillance level depend on the suspected crime description? Yes it does: there are some suspected crimes, especially ASSAULT, CPW, ROBBERY, LARCENY, where the stop+frisk rate is highly correlated with surveillance level (making up 71% of incidents). For other suspected crimes, there is no correlation.

### CHANCE OF BEING FOUND INNOCENT.

Might it be that in areas with high surveillance, the police do more uncalled-for stop+frisks, and hence there are more innocent people stopped? No. There is no correlation between the chance of being found innocent and the surveillance level.

### "STOPPED WHILE BLACK."

We'd expect that the stop+frisk rate should depend on the racial mix: in areas with a higher proportion of Black residents, a higher proportion of stop+frisk incidents are likely to be of Black people. Does this ratio vary according to surveillance level? No, not significantly. (The whopping great fact is that there are many more Black people stopped than other races. This is a property of the stop-and-frisk dataset, and it doesn't seem to be linked to camera surveillance, so it's outside the scope of this study of surveillance.)

## 2.5.1 SUSPECTED CRIME DESCRIPTION

```
# Analyse the correlation between num. stops (per capita) and num. cameras (per capita), across census tracts
# Use 2019 stop-and-frisk data
```

```

df <- as.data.table(expand.grid(SUSPECTED_CRIME_DESCRIPTION=unique(sqf$SUSPECTED_CR
IME_DESCRIPTION),
                                GEOID=unique(tracts$GEOID)))
df <- merge(df, as.data.table(sqf)[YEAR2==2019, list(numstops=.N), by=list(GEOID,SU
SPECTED_CRIME_DESCRIPTION)],
            by=c('GEOID','SUSPECTED_CRIME_DESCRIPTION'), all=TRUE)
df <- merge(df, census[, list(GEOID, popn)], by='GEOID', all=TRUE)
df <- merge(df, camera_count, by='GEOID', all=TRUE)
df <- merge(df, as.data.table(st_drop_geometry(tracts))[ , list(GEOID,borough)], by=
'GEOID', all=TRUE)
df[is.na(numstops), numstops := 0] # for the tracts with no recorded stops

# Surveillance Level has some off-the-scale values.
# A quick fix is to truncate. Another is to regress against rank (survC).
# Both give similar results here.
df[, surv := pmin(eff_cameras / popn * 1000, 3)]
#df[, survC := rank(surv) / .N]
fit <- lmList(numstops/popn*1000 ~ 1 + surv | SUSPECTED_CRIME_DESCRIPTION,
              data=df, subset=popn>250)


x <- summary(fit)
x <- as.data.frame(coef(x)[,2])
x$SUSPECTED_CRIME_DESCRIPTION <- row.names(x)

options(repr.plot.width=10, repr.plot.height=8)

ggplot(data=x) +
  geom_vline(xintercept=0, linetype='dotted') +
  geom_errorbarh(aes(xmin=Estimate-1.96*`Std. Error`, xmax=Estimate+1.96*`Std. Erro
r`, y=SUSPECTED_CRIME_DESCRIPTION)) +
  theme_bw(base_size=16) +
  ggtitle('Corr between stop.rate and surveillance (2019)') + ylab('')

```

Corr between stop.rate and surveillance

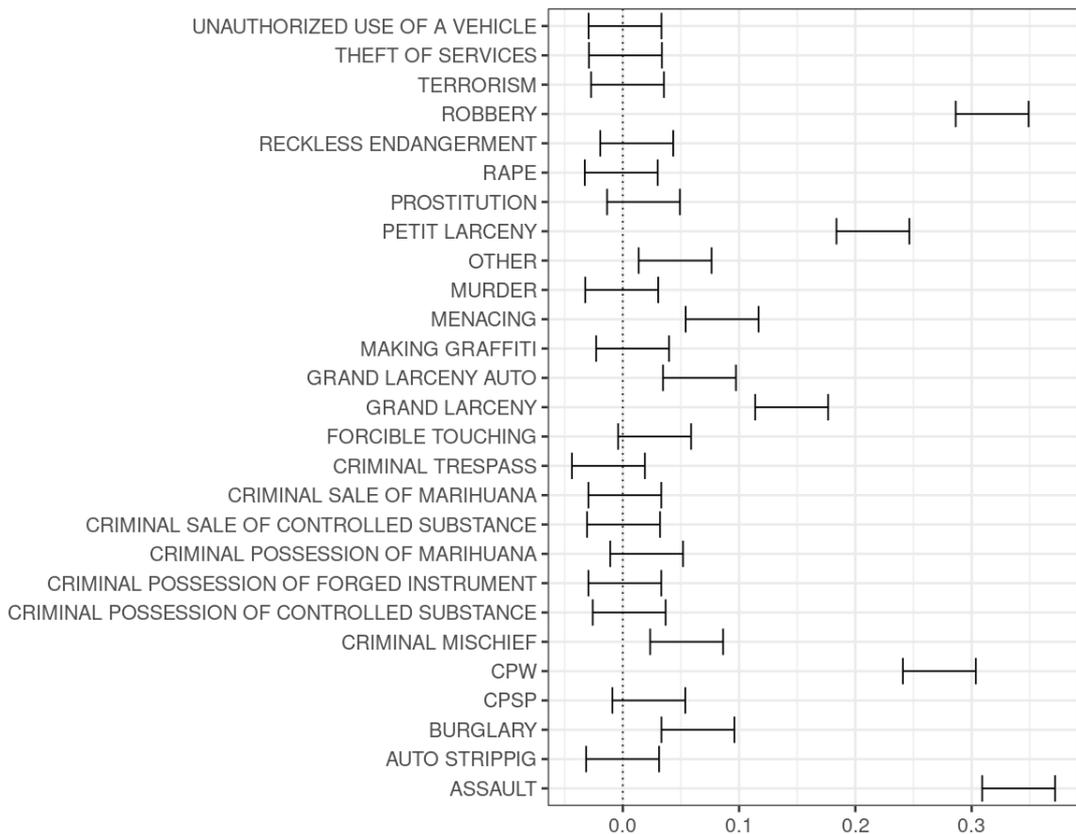

*# What fraction of stops (in 2019) are for the five high-correlation reasons?*

```
x <- as.data.table(sqf)[YEAR2==2019, list(numstops=.N), by=list(SUSPECTED_CRIME_DES
CRPTION)]
x[, corr := SUSPECTED_CRIME_DESCRIPTION %in% c('CPW','ASSAULT','ROBBERY','PETIT LAR
CENY','GRAND LARCENY')]
x[, list(numstops=sum(numstops)), by=corr][corr==TRUE,numstops] / sum(x$numstops)

[1] 0.7082993
```

#### 4.2 CHANCE OF BEING FOUND INNOCENT

*# Simple tabulation of #stops, #innocent, per SUSPECT\_RACE\_DESCRIPTION*

```
df <- as.data.table(st_drop_geometry(sqf))
df <- merge(df, camera_count, by='GEOID', all.x=TRUE)
df <- merge(df, census, by='GEOID', all.x=TRUE)

df[, innocent := SUSPECT_ARRESTED_FLAG=='N' & SUMMONS_ISSUED_FLAG=='N' & WEAPON_FOU
ND_FLAG=='N']
df[, surv := pmin(eff_cameras / popn * 1000, 3)]

df[, bwh := as.character(NA)]
df[SUSPECT_RACE_DESCRIPTION=='BLACK', bwh := 'BLACK']
df[SUSPECT_RACE_DESCRIPTION=='WHITE', bwh := 'WHITE']
df[SUSPECT_RACE_DESCRIPTION %in% c('BLACK HISPANIC', 'WHITE HISPANIC'), bwh := 'HIS
PANIC']

df[YEAR2==2019, list(n=.N, nInnocent=sum(innocent), percentInnocent=sum(innocent)/.
N*100), by=list(SUSPECT_RACE_DESCRIPTION)][order(-n)]
```

| SUSPECT_RACE_DESCRIPTION    | n    | nInnocent | percentInnocent |
|-----------------------------|------|-----------|-----------------|
| 1 BLACK                     | 7981 | 5131      | 64.29019        |
| 2 WHITE HISPANIC            | 2742 | 1728      | 63.01969        |
| 3 WHITE                     | 1215 | 755       | 62.13992        |
| 4 BLACK HISPANIC            | 1127 | 693       | 61.49068        |
| 5 ASIAN / PACIFIC ISLANDER  | 301  | 214       | 71.09635        |
| 6 (null)                    | 85   | 59        | 69.41176        |
| 7 AMERICAN INDIAN/ALASKAN N | 8    | 5         | 62.50000        |

*# Does your chance of being found innocent relate to surveillance?*

```
fit <- glm(innocent ~ 0 + bwh + bwh: surv,
           data = df,
           subset = popn>250 & !is.na(bwh) & YEAR2==2019)
summary(fit)
```

Call:

```
glm(formula = innocent ~ 0 + bwh + bwh: surv, data = df, subset = popn >
     250 & !is.na(bwh) & YEAR2 == 2019)
```

Deviance Residuals:

| Min     | 1Q      | Median | 3Q     | Max    |
|---------|---------|--------|--------|--------|
| -0.6788 | -0.6293 | 0.3544 | 0.3662 | 0.4304 |

Coefficients:

|                   | Estimate  | Std. Error | t value | Pr(> t )   |
|-------------------|-----------|------------|---------|------------|
| bwhBLACK          | 0.646634  | 0.006973   | 92.736  | <2e-16 *** |
| bwhHISPANIC       | 0.631055  | 0.009780   | 64.524  | <2e-16 *** |
| bwhWHITE          | 0.609913  | 0.017577   | 34.700  | <2e-16 *** |
| bwhBLACK: surv    | -0.009917 | 0.015486   | -0.640  | 0.522      |
| bwhHISPANIC: surv | -0.020469 | 0.022521   | -0.909  | 0.363      |
| bwhWHITE: surv    | 0.022974  | 0.034137   | 0.673   | 0.501      |

---

Signif. codes: 0 '\*\*\*' 0.001 '\*\*' 0.01 '\*' 0.05 '.' 0.1 ' ' 1

(Dispersion parameter for gaussian family taken to be 0.2314808)

Null deviance: 8177.0 on 12857 degrees of freedom  
 Residual deviance: 2974.8 on 12851 degrees of freedom  
 AIC: 17681

Number of Fisher Scoring iterations: 2

*# How about if we restrict attention to suspected\_crimes with a known link to surveillance?*

```
fit2 <- update(fit, subset = popn>250 & !is.na(bwh) & YEAR2==2019 & SUSPECTED_CRIME
              _DESCRIPTION %in% c('ASSAULT', 'ROBBERY'))
summary(fit2)
```

Call:

```
glm(formula = innocent ~ 0 + bwh + bwh: surv, data = df, subset = popn >
     250 & !is.na(bwh) & YEAR2 == 2019 & SUSPECTED_CRIME_DESCRIPTION %in%
     c("ASSAULT", "ROBBERY"))
```

Deviance Residuals:

| Min     | 1Q      | Median | 3Q     | Max    |
|---------|---------|--------|--------|--------|
| -0.7014 | -0.5940 | 0.3580 | 0.3838 | 0.5902 |

Coefficients:

| Estimate | Std. Error | t value | Pr(> t ) |
|----------|------------|---------|----------|
|----------|------------|---------|----------|

```

bwhBLACK      0.64603    0.01279  50.499  <2e-16 ***
bwhHISPANIC   0.59724    0.01856  32.176  <2e-16 ***
bwhWHITE      0.51712    0.04018  12.870  <2e-16 ***
bwhBLACK:surv -0.05235    0.02681  -1.952   0.051 .
bwhHISPANIC:surv -0.06248    0.04191  -1.491   0.136
bwhWHITE:surv  0.11626    0.07280   1.597   0.110

```

---

Signif. codes: 0 '\*\*\*' 0.001 '\*\*' 0.01 '\*' 0.05 '.' 0.1 ' ' 1

(Dispersion parameter for gaussian family taken to be 0.2367801)

Null deviance: 2252.00 on 3685 degrees of freedom  
Residual deviance: 871.11 on 3679 degrees of freedom  
AIC: 5156.9

Number of Fisher Scoring iterations: 2

#### 4.3 "STOPPED WHILE BLACK"

```

# We'd expect that #stops.black / #stops ~ popn.black / popn.
# Is this relationship impacted by surveillance level?
# No.
# (Whether or not I exclude Manhattan, which is a special case.)
# (I'm using a binarized version of surveillance level, to make it easier
# to interpret the surveillance:popn.black interaction term.)

```

```

df <- as.data.table(st_drop_geometry(sqf))
df <- df[YEAR2==2019, list(numstops=.N, numstops.black = sum(SUSPECT_RACE_DESCRIPTOR=='BLACK')), by=GEOID]
df <- merge(df, census, by='GEOID', all=TRUE)
df <- merge(df, camera_count, by='GEOID', all=TRUE)
df <- merge(df, as.data.table(st_drop_geometry(tracts))[, list(GEOID, borough)], by='GEOID', all=TRUE)
df[, surv := eff_cameras / popn * 1000]

fit <- lm(numstops.black/numstops ~ 1 + I(popn.black/popn)*I(surv>SURV_THRESHOLD),
          data = df,
          subset = popn>250 & borough != 'Manhattan')
summary(fit)

```

Call:

```

lm(formula = numstops.black/numstops ~ 1 + I(popn.black/popn) *
    I(surv > SURV_THRESHOLD), data = df, subset = popn > 250 &
    borough != "Manhattan")

```

Residuals:

```

      Min       1Q   Median       3Q      Max
-0.97535 -0.29650 -0.00389  0.17134  0.70482

```

Coefficients:

```

)
(Intercept)           0.29518    0.01482  19.913  <2e-16 ***
I(popn.black/popn)    0.76378    0.03564  21.433  <2e-16 ***
I(surv > SURV_THRESHOLD)TRUE  0.01589    0.02159   0.736   0.462
I(popn.black/popn):I(surv > SURV_THRESHOLD)TRUE -0.01331    0.05049  -0.264   0.792

```

---

Signif. codes: 0 '\*\*\*' 0.001 '\*\*' 0.01 '\*' 0.05 '.' 0.1 ' ' 1

Residual standard error: 0.3027 on 1512 degrees of freedom  
(311 observations deleted due to missingness)  
Multiple R-squared: 0.3739, Adjusted R-squared: 0.3727  
F-statistic: 301 on 3 and 1512 DF, p-value: < 2.2e-16

# ACKNOWLEDGEMENTS

Amnesty International would like to thank the more than 7,000 digital volunteers from around the world who analysed every intersection in New York City to find and categorise surveillance cameras, gave invaluable feedback and peer-to-peer support. Without you this research would not have been possible, thank you.

## **ANALYSIS OF CROWDSOURCED DATA**

Julien Cornebise, Ph.D. Department of Computer Science, University College London

Swetha Pillai

## **ANALYSIS OF STOP-AND-FRISK + CAMERA LOCATIONS**

Damon Wischik, Ph.D.

## **ADDITIONAL ANALYSIS**

Giulia Torino, Ph.D. Department of Geography, University of Cambridge

## **PARTNER ORGANISATION**

BetaNYC

## **MODELLING OF CAMERA RANGES**

Martyna Marciniak

## **INTERACTIVE WEBSITE**

Superposition

*Design and development. Concept in collaboration with Amnesty International.*

Essex and Cambridge Digital Verification Corps

*Early feedback*

# REFERENCES

- Efron, Bradley. 2003. 'Second Thoughts on the Bootstrap'. *Statistical Science* 18 (2): 135–40. <https://www.jstor.org/stable/3182843>.
- Efron, Bradley, and Robert J. Tibshirani. 1994. *An Introduction to the Bootstrap*. CRC press.
- Cornebise, Julien, and Swetha Pillai, Martyna, Marciniak, Sophie Dyer. 2021. Decode Surveillance NYC early analysis. Citizen Evidence Lab <https://citizenevidence.org/2021/11/17/decode-surveillance-early-analysis> (accessed 7 January 2021)
- Hayes, Andrew F., and Klaus Krippendorff. 2007. 'Answering the Call for a Standard Reliability Measure for Coding Data'. *Communication Methods and Measures* 1 (1): 77–89. <https://doi.org/10.1080/19312450709336664>.
- Krippendorff, Klaus. 1970. 'Estimating the Reliability, Systematic Error and Random Error of Interval Data'. *Educational and Psychological Measurement* 30 (1): 61–70. <https://doi.org/10.1177/001316447003000105>.
- . 2004a. *Content Analysis: An Introduction to Its Methodology*. 2nd edition. Sage publications.
- . 2004b. 'Reliability in Content Analysis'. *Human Communication Research* 30 (3): 411–33. <https://doi.org/10.1111/j.1468-2958.2004.tb00738.x>.
- . 2011. 'Agreement and Information in the Reliability of Coding'. *Communication Methods and Measures* 5 (2): 93–112. <https://doi.org/10.1080/19312458.2011.568376>.
- . 2020. 'A Quadrilogy for Big Data Reliabilities', October.

**AMNESTY INTERNATIONAL  
IS A GLOBAL MOVEMENT  
FOR HUMAN RIGHTS.  
WHEN INJUSTICE HAPPENS  
TO ONE PERSON, IT  
MATTERS TO US ALL.**

## CONTACT US



[info@amnesty.org](mailto:info@amnesty.org)



+44 (0)20 7413 5500

## JOIN THE CONVERSATION



[www.facebook.com/AmnestyGlobal](http://www.facebook.com/AmnestyGlobal)



[@Amnesty](https://twitter.com/Amnesty)

# DECODE SURVEILLANCE NYC

## METHODOLOGY

Since 2016, Amnesty Decoders has leveraged microtasking and participatory methods from citizen science to address large-scale research questions in human rights.

Decode Surveillance NYC launched in May 2021. Over ten weeks, more than 7,000 digital volunteers from around the world analysed every intersection in New York City. The effort found and categorised tens of thousands of CCTV cameras, revealing for the first time which areas of the city are most exposed to surveillance via facial recognition technology.